



CT40 CT40 XP RUGGED MOBILE COMPUTER


Configuration Guide

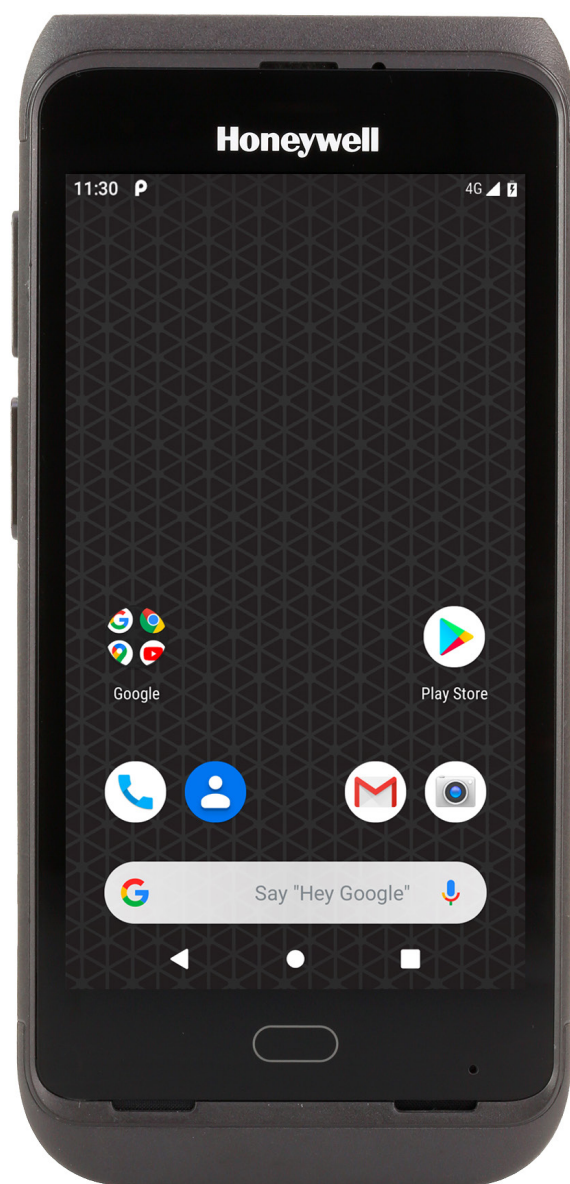

CT40

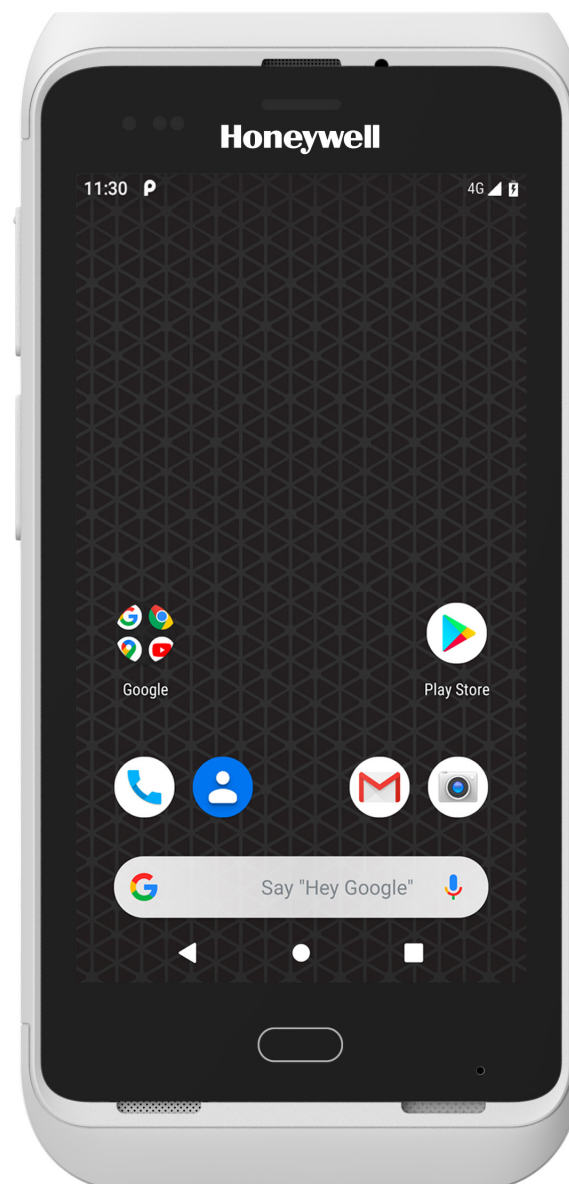

CT40 HEALTHCARE

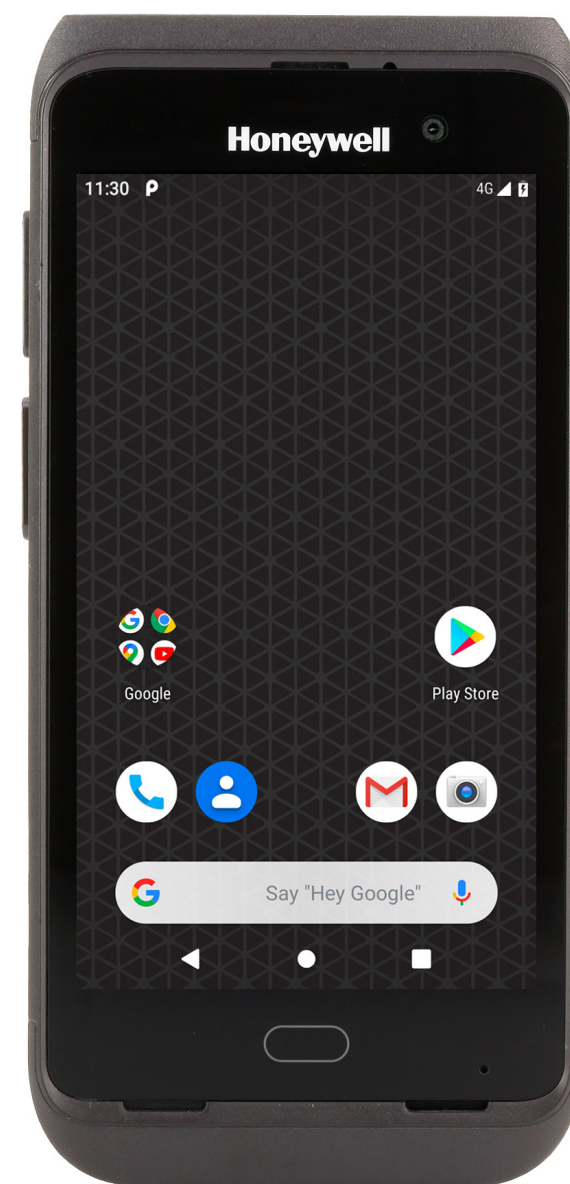

CT40 XP

THE
FUTURE
IS
WHAT
WE
MAKE IT

Honeywell

TABLE OF CONTENTS

2	CT40 FEATURE OVERVIEW N3601 STANDARD RANGE N6703 STANDARD RANGE DISINFECTANT READY HOUSING - N6703 STANDARD RANGE N6803 FLEXRANGE™ NEAR/ FAR RANGE HEALTHCARE - N6700 GREEN LINEAR LED AIMER - STANDARD RANGE	23	CT40 / CT40 XP VEHICLE INSTALL OPTION 1 – PORTABLE/ SUB CONTRACTOR INSTALL OPTION 2 – PORTABLE/ SUB CONTRACTOR INSTALL OPTION 3 - FIXED VEHICLE INSTALL WITH DIRECT CONNECTION TO VEHICLE BATTERY OPTION 4 - FIXED VEHICLE INSTALL WITH DIRECT CONNECTION TO VEHICLE BATTERY/ FUSE BLOCK OPTION 5 - FIXED VEHICLE INSTALL WITH THOR DC/DC CONVERTER
6	CT40 CONFIGURATION MAP ANDROID	27	CT40 / CT40 XP VEHICLE INSTALL CT40 VEHICLE DOCK 360 DEGREE VIEW
7	CT40 XP FEATURE OVERVIEW N6703 STANDARD RANGE N6803 FLEXRANGE™ NEAR/ FAR RANGE DISINFECTANT READY HOUSING - N6703 STANDARD RANGE DISINFECTANT READY HOUSING - N6803 FLEXRANGE™ NEAR/ FAR RANGE HEALTHCARE - N6700 GREEN LINEAR LED AIMER - STANDARD RANGE	28	CT40 / CT40 XP CHARGING AND COMMUNICATION OPTION 1 - NON-BOOTED QUAD CHARGER OPTION 2 - NON-BOOTED QUAD CHARGER WITH UNIVERSAL CUP OPTION 3 - BOOTED QUAD CHARGER OPTION 4 - BOOTED QUAD CHARGER WITH UNIVERSAL CUP OPTION 5 - QUAD BATTERY CHARGER
10	CT40 XP CONFIGURATION MAP ANDROID	31	SPARE BATTERY OPTIONS
11	HONEYWELL EDGE SERVICES GOLD REPAIR SERVICES - 3 YEAR PLATINUM REPAIR SERVICES - 3 YEAR GOLD REPAIR SERVICES - 5 YEAR PLATINUM REPAIR SERVICES - 5 YEAR	32	IH21 RFID READER
13	HONEYWELL REPAIR SERVICES CT40 / CT40 XP - REPAIR SERVICES COVERAGE	33	IH25 RFID READER
14	CT40 / CT40 XP SOFTWARE DEVICE CLIENT PACK	34	IH25 RFID READER CHARGING OPTIONS
15	CT40 / CT40 XP SCANNING SCAN HANDLE SIDE BY SIDE COMPARISON OPTION 1 - SCAN HANDLE OPTION 2 - SCAN HANDLE WITH PROTECTIVE BOOT OPTION 3 - SCAN HANDLE FOR USE WITH CAMERA	35	CT40 HEALTHCARE CHARGING AND COMMUNICATION OPTION 1 - NON-BOOTED QUAD CHARGER WITH UNIVERSAL CUP OPTION 2 - BOOTED QUAD CHARGER WITH UNIVERSAL CUP OPTION 3 - CT40 HC DISPLAY BASE WITH UNIVERSAL CUP
19	CT40 / CT40 XP DESKTOP COMMUNICATIONS OPTION 1 – PORTABLE - NON-BOOTED OPTION 2 – PORTABLE - NON-BOOTED OR BOOTED OPTION 3 – CT40 XP USB TYPE C ON-THE-GO (OTG) DESKTOP OPTION 4 – CT40 XP USB TYPE C ON-THE-GO (OTG) VEHICLE OPTION 5 – FIXED OPTION 6 – FIXED WITH UNIVERSAL CUP OPTION 7 – DISPLAY BASE OPTION 8 – DISPLAY BASE WITH UNIVERSAL CUP	37	CT40 / CT40 XP PROTECTIVE BOOT OPTION 1 - RUBBER BOOT OPTION 2 - DOCKABLE PROTECTIVE BOOT
		38	CT40 PUSH TO TALK (PTT) AND VOIP HEADSET
		41	CT40 / CT40 XP WEARABLE WITH TETHERED RING SCANNER OPTION 1 - CT40 WEARABLE WITH D75E ARM BAND OPTION 2 - CT40 WEARABLE - ARM BAND WRIST PAD
		42	MISCELLANEOUS OPTIONAL PARTS MICRO-SD CARDS AC CORDS

CT40 FEATURE OVERVIEW

N3601 Standard Range

N6703 Standard Range


Included in the box:

- CT40 Mobile Computer
- Battery (318-055-067)
- Hand strap

(Stylus is NOT included, but available to order separately as an accessory)



N6703 Standard Range

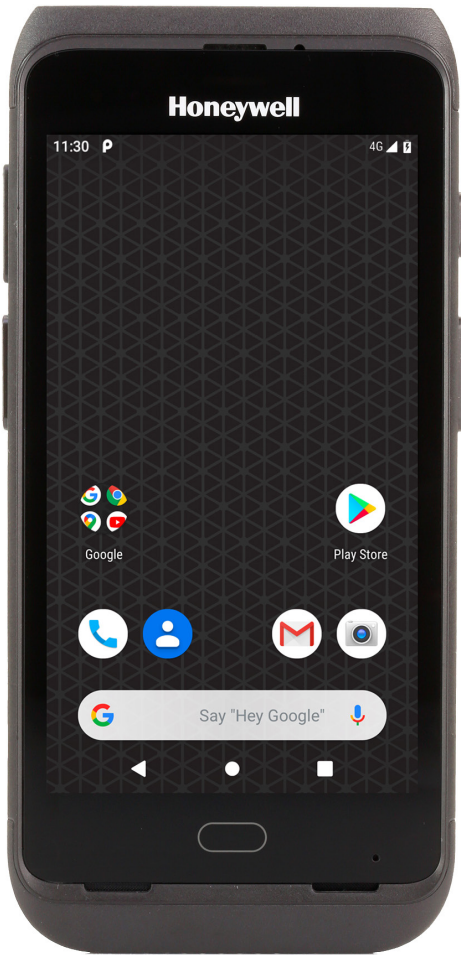

N3601 Standard Range



3.5mm Audio Jack
(WiFi Models Only CT40-LON-xxxxxAx)

CT40 Android - 4G WWAN - N6703 - 4GB RAM/ 32GB Flash

CT40-L1N-27C11Bx

CT40, Android, WWAN, 802.11 a/b/g/n/ac/r/k/mc, 1D/2D Imager SR (N6703), 4GB/32GB Memory, 13MP Camera, BT 5.0, NFC, Gen 2 Battery 4,020 mAh

CT40 Android - WiFi Only - N6703 - 4GB RAM/ 32GB Flash

CT40-LON-27C11Ax

CT40, Android, WLAN, 802.11 a/b/g/n/ac/r/k/mc, 1D/2D Imager SR (N6703), 4GB/32GB Memory, 13MP Camera, BT 5.0, NFC Gen 2 Battery 4,020 mAh, 3.5mm Audio Jack
(Does not include headset, order CT40-HDST-35MM separately)

CT40 Android - 4G WWAN - N3601 - 2GB RAM/ 32GB Flash

CT40-L1N-1NC11Bx

CT40, Android, WWAN, 802.11 a/b/g/n/ac/r/k/mc, 1D/2D Imager SR (N3601), 2GB/32GB Memory, 13MP Camera, BT 5.0, NFC, Gen 2 Battery 4,020 mAh

CT40 Android - WiFi Only - N3601 - 2GB RAM/ 32GB Flash

CT40-LON-1NC11Ax

CT40, Android, WWAN, 802.11 a/b/g/n/ac/r/k/mc, 1D/2D Imager SR (N3601), 2GB/32GB Memory, 13MP Camera, BT 5.0, NFC, Gen 2 Battery 4,020 mAh, 3.5mm Audio Jack
(Does not include headset, order CT40-HDST-35MM separately)

(Note: x = Domain, select appropriate Domain from Configuration Map on page 6)

Honeywell Repair Services

SVCCT40-SG3N

CT40 / CT40 XP, Edge Service, Gold Maintenance Contract, 3 Year, New Contract

ADD SVCREPLACE-MOB3

AddOn, Edge Service, Device Replacement, Mobility, 3 Year



CT40 FEATURE OVERVIEW

Disinfectant Ready Housing - N6703 Standard Range


Included in the box:

- CT40 Mobile Computer
- Battery (318-055-D67)
- Healthcare Hand strap



(Stylus is NOT included, but available to order separately as an accessory)



No Audio Jack
(WWAN Models CT40-L1N-xxxxxDx)

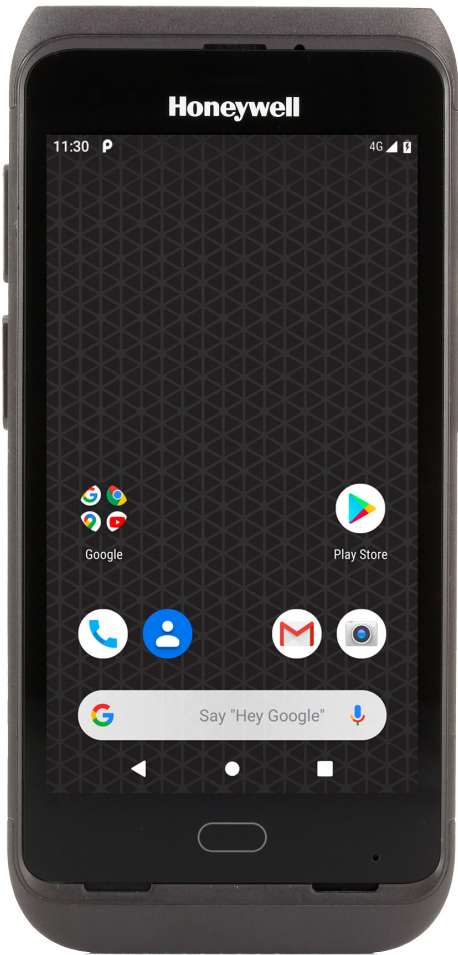

N6703 Standard Range



3.5mm Audio Jack
(WiFi Models Only CT40-L0N-xxxxxDx)

CT40 Android - 4G WWAN - N6703 - 4GB RAM/ 32GB Flash

CT40-L1N-27C11Dx	CT40 Disinfectant Ready, Android, WWAN, 802.11 a/b/g/n/ac/r/k/mc, 1D/2D Imager SR(N6703), 4GB/32GB Memory, 13MP Camera, BT 5.0, NFC, Battery 4,020 mAh Disinfectant Ready Cover, Healthcare hand strap
-------------------------	--

CT40 Android - WiFi Only - N6703 - 4GB RAM/ 32GB Flash

CT40-L0N-27C11Dx	CT40 Disinfectant Ready, Android, WLAN, 802.11 a/b/g/n/ac/r/k/mc, 1D/2D Imager SR(N6703), 4GB/32GB Memory, 13MP Camera, BT 5.0, NFC, Battery 4,020 mAh Disinfectant Ready Cover, Healthcare hand strap
-------------------------	--

(Note: x = Domain, select appropriate Domain from Configuration Map on page 6)

Honeywell Repair Services

SVCCT40-SG3N	CT40 / CT40 XP, Edge Service, Gold Maintenance Contract, 3 Year, New Contract
ADD SVCREPLACE-MOB3	AddOn, Edge Service, Device Replacement, Mobility, 3 Year



CT40 FEATURE OVERVIEW

N6803 FlexRange™ Near/ Far Range




Included in the box:

- CT40 Mobile Computer
- Battery (318-055-067)
- Hand strap


(Stylus is NOT included, but available to order separately as an accessory)



No Audio Jack
(WWAN Models CT40-L1N-xxxxxBx)

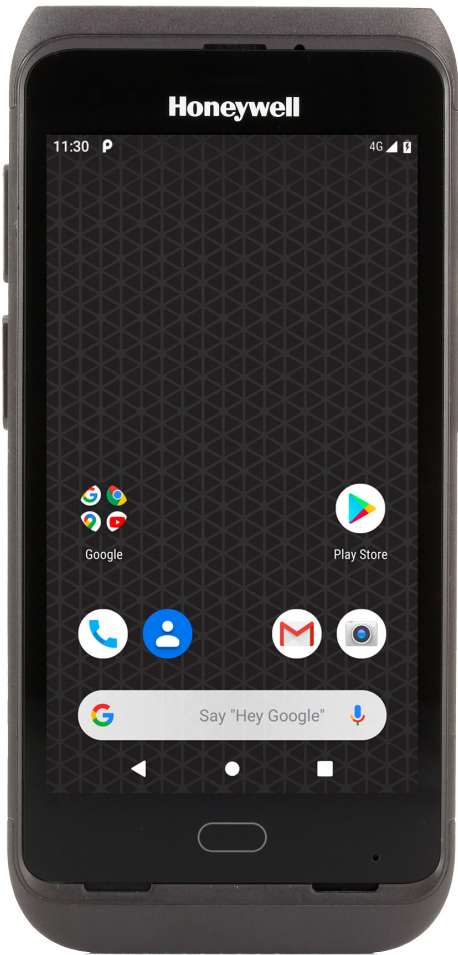

N6803 FlexRange™

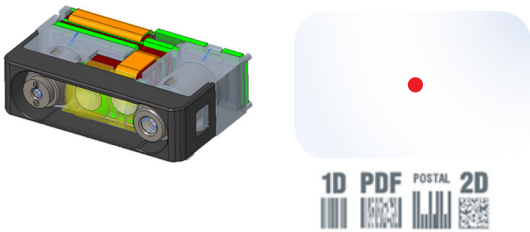

3.5mm Audio Jack
(WiFi Models Only CT40-LON-xxxxxAx)

CT40 Android - 4G WWAN – N6803 FlexRange – 4GB RAM/ 32GB Flash

CT40-L1N-28C11Bx CT40, Android, WWAN, 802.11 a/b/g/n/ac/r/k/mc, 1D/2D Imager SR (N6803) FlexRange, 4GB/32GB Memory, 13MP Camera, BT 5.0, NFC, Gen 2 Battery 4,020 mAh

CT40 Android - WiFi Only – N6803 FlexRange – 4GB RAM/ 32GB Flash

CT40-LON-28C11Ax CT40, Android, WLAN, 802.11 a/b/g/n/ac/r/k/mc, 1D/2D Imager SR (N6803) FlexRange, 4GB/32GB Memory, 13MP Camera, BT 5.0, NFC, Battery 4,020 mAh, Metal battery latch button, 3.5mm Audio Jack
(Does not include headset, order CT40-HDST-35MM separately)

(Note: x = Domain, select appropriate Domain from Configuration Map on page 6)

Honeywell Repair Services

SVCCT40-SG3N

CT40 / CT40 XP, Edge Service, Gold Maintenance Contract, 3 Year, New Contract


ADD SVCREPLACE-MOB3

AddOn, Edge Service, Device Replacement, Mobility, 3 Year




CT40 FEATURE OVERVIEW


Healthcare – N6700 Green Linear LED Aimer – Standard Range




Disinfectant Ready



4G LTE / GPS



WiFi / BT




N6700 Scanner


Included in the box:

- CT40 Mobile Computer
- Battery (318-055-H67)
- CT40 WWAN includes Healthcare Handstrap
- CT40 WiFi does NOT include Healthcare Handstrap

(Stylus is NOT included, but available to order separately as an accessory)

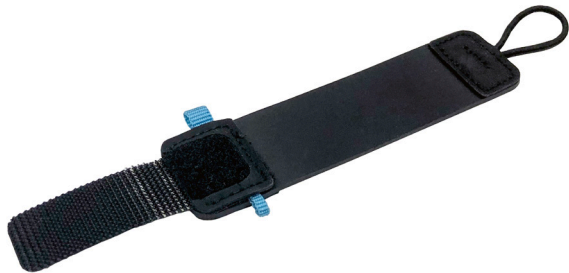

N6700

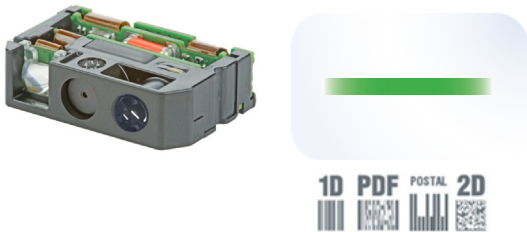

CT40 Android – WWAN – N6700 – 4GB RAM/ 32GB Flash – Healthcare

CT40-L1N-2LC11Hx CT40, Android, WWAN, 802.11 a/b/g/n/ac/r/k/mc, 1D/2D Imager SR (N6700) with Linear LED Aimer, 4GB/32GB Memory, 13MP Camera, BT 5.0, NFC, Gen 2 Battery 4,020 mAh, White Healthcare, includes Healthcare Handstrap.

CT40 Android – WiFi Only – N6700 – 4GB RAM/ 32GB Flash – Healthcare

CT40-LON-2LC11Hx CT40, Android, WLAN, 802.11 a/b/g/n/ac/r/k/mc, 1D/2D Imager SR (N6700) with Linear LED Aimer, 4GB/32GB Memory, 13MP Camera, BT 5.0, NFC, Gen 2 Battery 4,020 mAh, White Healthcare without Handstrap.

(Note: x = Domain, select appropriate Domain from Configuration Map on page 6)






Honeywell Repair Services

SVCCT40-SG3N	CT40 / CT40 XP, Edge Service, Gold Maintenance Contract, 3 Year, New Contract
ADD SVCREPLACE-MOB3	AddOn, Edge Service, Device Replacement, Mobility, 3 Year



CT40 CONFIGURATION MAP

Android


											DESCRIPTION	NOTES
BLUETOOTH/ WIFI												
WWAN												
NFC												
MEMORY												
IMAGER												
CAMERA												
OPERATING SYSTEM												
APPLICATION												
OPTIONS												
DOMAIN												
CT40-												
L											802.11 a/b/g/n/ac + Bluetooth 5.0	IEEE 802.11 a/b/g/n/ac/r/k/mc ; Wi-Fi certified V5.0 Bluetooth and BLE Supported Bluetooth Profiles: HFP,PBAP, A2DP, AVRCP, OPP, SPP, GATT
	0										No WWAN	
	1										LTE (4G) GPS, UMTS/HSPA+ (3G) GSM/GPRS/EDGE	WWAN RADIO (ATT/VZW/SPRINT/TMO/NA/EU) LTE (FDD) – BANDS 1,2,3,4,5,7 .8,12,13,17,19,20,25,26,28,29 / LTE (TDD) – BANDS 38,39,40,41 UMTS/HSPA+ (3G) – BANDS 1, 2, 4, 5, 6, 8, 9, 19 / GSM/GPRS/EDGE QUAD-BAND (850/900/1800/1900 MHZ)
		N									Near Field Communications (NFC)	
			--									
				1							2GB RAM, 32GB Flash Memory	2.2 GHz Qualcomm Snapdragon™ 660 octa-core
				2							4GB RAM, 32GB Flash Memory	2.2 GHz Qualcomm Snapdragon™ 660 octa-core
					L						1D/2D Imager (N6700) – Standard Range	
					N						1D/2D Imager (N3601) – Standard Range	
					S						1D/2D Imager (N6603SR) – Standard Range	
					7						1D/2D Imager (N6703SR) – Standard Range	
					8						1D/2D Imager (N6803FR) – FlexRange™	
						C					Camera	13MP Rear Camera
							1				Android (GMS)	Google Mobile Services (GMS) certified – Play Store
							2				Android (Non-GMS)	
								1			Standard Software Build	
									0		Standard	
									A		Audio Jack – New Battery Latch	3.5mm Audio Jack - supports PTT, VOIP – Only available on WiFi Only models (CT40-LO-xxxxxxx)
									B		No Audio Jack – New Battery Latch	
									D		Disinfectant Ready Housing - Honeywell Grey Colour	Disinfectant Ready Housings (DRHs). DRHs utilize plastics designed to withstand the harshness of frequent cleaning with disinfectants without compromising the lifespan of the equipment.
									H		Healthcare - White	CT40 Healthcare is made from disinfectant-ready materials that are designed to withstand frequent cleaning using approved disinfecting and sanitizing agents.
										A	ANZ & Argentina	Argentina, Australia, New Zealand
										E	WorldWide	Austria, Belgium, Brazil, Bulgaria, Chile, Columbia, Croatia, Cyprus, Czech Republic, Denmark, Dominican Republic, Ecuador, El Salvador, Estonia, Finland, France, Germany, Greece, Hong Kong, Hungary, Iceland, Ireland, Italy, Japan, Latvia, Liechtenstein, Lithuania, Luxembourg, Malta, Netherlands, Norway, Peru, Philippines, Poland, Portugal, Romania, Singapore, Slovakia, Slovenia, South Korea, Spain, Sweden, Switzerland, Thailand, United Kingdom, Venezuela
										F	FCC	USA, Canada, Guatemala, Mexico, Panama, Puerto Rico, Taiwan
										M	Miscellaneous 2.4GHz	Egypt, Honduras, Indonesia, Malaysia




CT40 XP FEATURE OVERVIEW

N6703 Standard Range


N6803 FlexRange™ Near/ Far Range




Warm Battery Swap




Gorilla Glass 5



4G LTE / GPS



WiFi / BT



N6703
N6803
FlexRange
Scanner

Included in the box:


- CT40 Mobile Computer
- Battery (318-055-067)
- Hand strap

(Stylus is NOT included, but available to order separately as an accessory)

N6703 Standard Range



No Audio Jack / USB Type C
(WWAN Models CT40P-L1N-xxxxxBx)

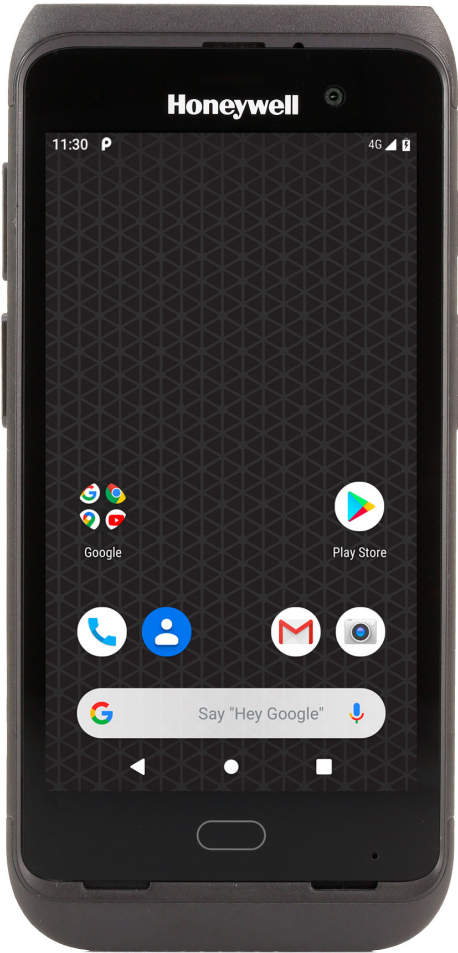

N6803 FlexRange™



3.5mm Audio Jack / USB Type C
(WiFi Models Only CT40P-LON-xxxxxAx)

CT40 XP Android - 4G WWAN - N6703 Standard Range - 4GB RAM/ 32GB Flash

CT40P-L1N-27R11Bx	CT40 XP, WWAN, 4GB/32GB Memory, 5inch 1920x1080P full HD, N6703, 13MP Rear Camera/8MP Front Camera, 802.11 a/b/g/n/ac/r/k/mc, 2x2 MIMO,Bluetooth 5.0 & 2nd BLE, Android GMS, Warm Swap, IP67&65, Metal battery latch button, USB Type C OTG, PTT
--------------------------	--

CT40 XP Android - WiFi Only - N6703 Standard Range - 4GB RAM/ 32GB Flash

CT40P-LON-27R11Ax	CT40 XP, WLAN, 4GB/32GB Memory, 5inch 1920x1080P full HD, N6703, 13MP Rear Camera/8MP Front Camera, 802.11 a/b/g/n/ac/r/k/mc, 2x2 MIMO,Bluetooth 5.0 & 2nd BLE, Android GMS, Warm Swap, IP67&65, Metal battery latch button, 3.5mm Audio Jack, USB Type C OTG, PTT
--------------------------	--

CT40 XP Android - 4G WWAN - N6803 FlexRange - 4GB RAM/ 32GB Flash

CT40P-L1N-28R11Bx	CT40 XP, WWAN, 4GB/32GB Memory, 5inch 1920x1080P full HD, N6803 FlexRange, 13MP Rear Camera/8MP Front Camera, 802.11 a/b/g/n/ac/r/k/mc, 2x2 MIMO,Bluetooth 5.0 & 2nd BLE, Android GMS, Warm Swap, IP67&65, Metal battery latch button, USB Type C OTG, PTT
--------------------------	--

CT40 XP Android - WiFi Only - N6803 FlexRange - 4GB RAM/ 32GB Flash

CT40P-LON-28R11Ax	CT40 XP, WLAN, 4GB/32GB Memory, 5inch 1920x1080P full HD, N6803 FlexRange, 13MP Rear Camera/8MP Front Camera, 802.11 a/b/g/n/ac/r/k/mc, 2x2 MIMO,Bluetooth 5.0 & 2nd BLE, Android GMS, Warm Swap, IP67&65, Metal battery latch button, 3.5mm Audio Jack, USB Type C OTG, PTT
--------------------------	--

(Note: x = Domain, select appropriate Domain from Configuration Map on page 10)

Honeywell Repair Services

SVCCT40-SG3N	CT40 / CT40 XP, Edge Service, Gold Maintenance Contract, 3 Year, New Contract
ADD SVCREPLACE-MOB3	AddOn, Edge Service, Device Replacement, Mobility, 3 Year



CT40 XP FEATURE OVERVIEW

Disinfectant Ready Housing - N6703 Standard Range

Disinfectant Ready Housing - N6803 FlexRange™ Near/ Far Range

Disinfectant Ready

Warm Battery Swap

Display

4G LTE / GPS

WiFi / BT

Scanner

Included in the box:


- CT40 Mobile Computer
- Battery (318-055-D67)
- Healthcare Hand strap

(Stylus is NOT included, but available to order separately as an accessory)

N6703 Standard Range



No Audio Jack / USB Type C
(WWAN Models CT40P-L1N-xxxxxBx)

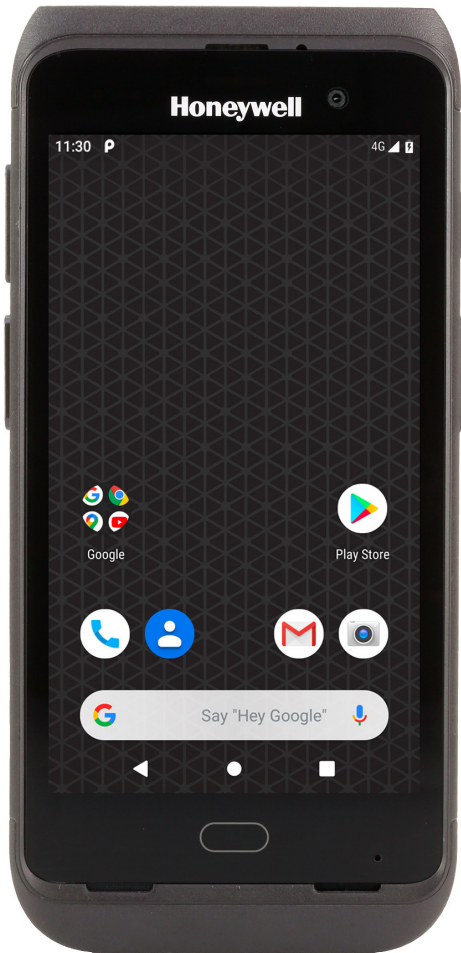

N6803 FlexRange™



3.5mm Audio Jack / USB Type C
(WiFi Models Only CT40P-LON-xxxxxAx)

CT40 XP Android - 4G WWAN - N6703 Standard Range - 4GB RAM/ 32GB Flash

CT40P-L1N-27R11Dx	CT40 XP Disinfectant Ready, WWAN, 4GB/32GB Memory, 5inch 1920x1080P full HD, N6703, 13MP Rear Camera/8MP Front Camera, 802.11 a/b/g/n/ac/r/k/mc, 2x2 MIMO,Bluetooth 5.0 & 2nd BLE, Android GMS, Warm Swap, IP67&65, USB Type C OTG, PTT
--------------------------	---

CT40 XP Android - WiFi Only - N6703 Standard Range - 4GB RAM/ 32GB Flash

CT40P-LON-27R11Dx	CT40 XP Disinfectant Ready, WLAN, 4GB/32GB Memory, 5inch 1920x1080P full HD, N6703, 13MP Rear Camera/8MP Front Camera, 802.11 a/b/g/n/ac/r/k/mc, 2x2 MIMO,Bluetooth 5.0 & 2nd BLE, Android GMS, Warm Swap, IP67&65, 3.5mm Audio Jack, USB Type C OTG, PTT
--------------------------	---

CT40 XP Android - 4G WWAN - N6803 FlexRange - 4GB RAM/ 32GB Flash

CT40P-L1N-28R11Dx	CT40 XP Disinfectant Ready, WWAN, 4GB/32GB Memory, 5inch 1920x1080P full HD, N6803 FlexRange, 13MP Rear Camera/8MP Front Camera, 802.11 a/b/g/n/ac/r/k/mc, 2x2 MIMO,Bluetooth 5.0 & 2nd BLE, Android GMS, Warm Swap, IP67&65, USB Type C OTG, PTT
--------------------------	---

CT40 XP Android - WiFi Only - N6803 FlexRange - 4GB RAM/ 32GB Flash

CT40P-LON-28R11Dx	CT40 XP Disinfectant Ready, WLAN, 4GB/32GB Memory, 5inch 1920x1080P full HD, N6803 FlexRange, 13MP Rear Camera/8MP Front Camera, 802.11 a/b/g/n/ac/r/k/mc, 2x2 MIMO,Bluetooth 5.0 & 2nd BLE, Android GMS, Warm Swap, IP67&65, 3.5mm Audio Jack, USB Type C OTG, PTT
--------------------------	---

(Note: x = Domain, select appropriate Domain from Configuration Map on page 10)

Honeywell Repair Services

SVCCT40-SG3N	CT40 / CT40 XP, Edge Service, Gold Maintenance Contract, 3 Year, New Contract
ADD SVCREPLACE-MOB3	AddOn, Edge Service, Device Replacement, Mobility, 3 Year




CT40 XP FEATURE OVERVIEW


Healthcare – N6700 Green Linear LED Aimer – Standard Range

Included in the box:


- CT40 Mobile Computer
- Battery (318-055-H67)
- Healthcare Handstrap

(Stylus is NOT included, but available to order separately as an accessory)

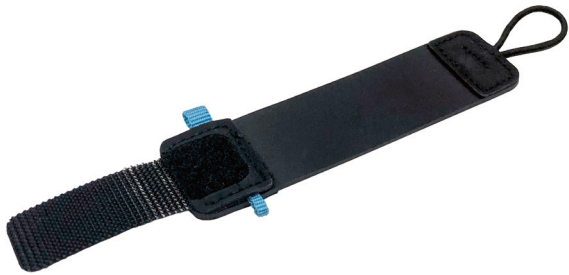





Disinfectant Ready



4G LTE / GPS




WiFi / BT



N6700 Scanner



N6700

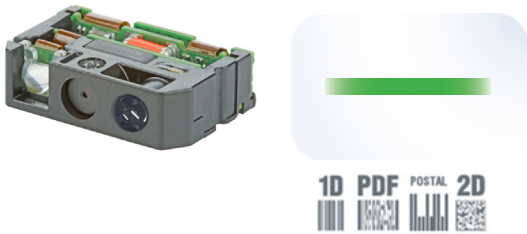

CT40 Android – WWAN – N6700 – 4GB RAM/ 32GB Flash – Healthcare

CT40P-L1N-2LR11Hx	CT40 XP Healthcare, WWAN,4GB/32GB Memory, 5 inch 1920x1080P full HD, N6700 with linear LED aimer, 13MP Rear Camera/8MP Front Camera,802.11 a/b/g/n/ac/r/k/mc,2x2 MIMO, BT5.0 & 2nd BLE, Android GMS, Smart Battery, Warm Swap,IP67&65,Metal battery latch button,PTT, Includes Healthcare Handstrap
--------------------------	---

CT40 Android – WiFi Only – N6700 – 4GB RAM/ 32GB Flash – Healthcare

CT40P-L0N-2LR11Hx	CT40 XP Healthcare, WLAN,4GB/32GB Memory, 5 inch 1920x1080P full HD, N6700 with linear LED aimer, 13MP Rear Camera/8MP Front Camera,802.11 a/b/g/n/ac/r/k/mc,2x2 MIMO, BT5.0 & 2nd BLE, Android GMS, Smart Battery, Warm Swap,IP67&65,Metal battery latch button,PTT, Includes Healthcare Handstrap
--------------------------	---

(Note: x = Domain, select appropriate Domain from Configuration Map on page 10)





Honeywell Repair Services

SVCCT40-SG3N	CT40 / CT40 XP, Edge Service, Gold Maintenance Contract, 3 Year, New Contract
ADD SVCREPLACE-MOB3	AddOn, Edge Service, Device Replacement, Mobility, 3 Year



CT40 XP CONFIGURATION MAP

Android

												DESCRIPTION	NOTES							
BLUETOOTH/ WIFI	WWAN	NFC		MEMORY	IMAGER	CAMERA	OPERATING SYSTEM	APPLICATION	OPTIONS	DOMAIN										
CT40P-																				
	L											802.11 a/b/g/n/ac + Bluetooth 5.0	2x2 MIMO IEEE 802.11 a/b/g/n/ac/r/k/mc ; Wi-Fi certified V5.0 Bluetooth and BLE Supported Bluetooth Profiles: HFP,PBAP, A2DP, AVRCP, OPP, SPP, GATT							
		0										No WWAN								
		1										LTE (4G) GPS, UMTS/HSPA+ (3G) GSM/GPRS/EDGE	WWAN RADIO (ATT/VZW/SPRINT/TMO/NA/EU) LTE (FDD) – BANDS 1,2,3,4,5,7 ,8,12,13,17,19,20,25,26,28,29 / LTE (TDD) – BANDS 38,39,40,41 UMTS/HSPA+ (3G) – BANDS 1, 2, 4, 5, 6, 8, 9, 19 / GSM/GPRS/EDGE QUAD-BAND (850/900/1800/1900 MHZ)							
			N									Near Field Communications (NFC)								
				--																
					2							4GB RAM, 32GB Flash Memory	2.2 GHz Qualcomm Snapdragon™ 660 octa-core							
						L						1D/2D Imager (N6700) – Standard Range								
							7					1D/2D Imager (N6703SR) – Standard Range								
								8				1D/2D Imager (N6803FR) – FlexRange™								
									R			13MP Rear Camera / 8MP Front Facing Camera								
								1				Android (GMS)	Google Mobile Services (GMS) certified – Play Store							
									2			Android (Non-GMS)								
									1		Standard Software Build									
										D	WWAN Data Only									
											A	Audio Jack – New Battery Latch – USB Type C OTG (On The Go)	3.5mm Audio Jack - supports PTT, VOIP – Only available on WiFi Only models (CT40P-L0-xxxxxxx)							
												B	No Audio Jack – New Battery Latch – USB Type C OTG (On The Go)							
													D	Disinfectant Ready Housing - Honeywell Grey Colour	Disinfectant Ready Housings (DRHs). DRHs utilize plastics designed to withstand the harshness of frequent cleaning with disinfectants without compromising the lifespan of the equipment.					
														H	Healthcare - White	CT40 Healthcare is made from disinfectant-ready materials that are designed to withstand frequent cleaning using approved disinfecting and sanitizing agents.				
															E	WorldWide	Argentina, Australia, Austria, Belgium, Brazil, Bulgaria, Columbia, Croatia, Cyprus, Czech Republic, Denmark, Dominican Republic, Egypt, Estonia, Finland, France, Germany, Greece, Honduras, Hong Kong, Iceland, India, Indonesia, Ireland, Italy, Japan, Jordan, Kuwait, Latvia, Liechtenstein, Lithuania, Luxembourg, Malaysia, Malta, Morocco, Netherlands, New Zealand, Norway, Oman, Poland, Portugal, Qatar, Romania, Russia, Saudi Arabia, Singapore, Slovakia, Slovenia, South Africa, South Korea, Spain, Sri Lanka, Sweden, Switzerland, Thailand, UAE, Ukraine, United Kingdom, Vietnam			
																F	FCC	USA, Canada, Guatemala, Mexico, Panama, Paraguay, Puerto Rico, Taiwan, Venezuela		
																	T	Turkey	WWAN Data Only	
																		I	Indonesia	WWAN 3G Radio



HONEYWELL EDGE SERVICES

CT40 / CT40 XP – Repair Services

Honeywell Edge Services give you the confidence of having leading-class technologies combined with service and support plans that are designed to keep you operational for longer.

Gold Repair Services – 3 Year

The most flexible contract in the industry. The Edge Services Gold Support contract allows you to select the right coverage for your organization, and includes 5-Day Depot Repairs and:

Service Overview

- Repair or replacement of damaged components, wear and tear, and accidental damage.
- Flexibility to add any Add-On Service

PART NUMBER	DESCRIPTION
SVCCT40-SG3N	CT40 / CT40 XP, Edge Service, GOLD Maintenance Contract, 5 Day Turnaround, 3 Year , New Contract

Add-On Accessory Replacement Service

Provides replacement chargers, docks, charging cables, or scan handles should they be damaged or stop working.

ADD	SVCACC-MOB3	AddOn, Edge Service, Accessory Service , Mobility, 3 Year . Service covers docks, charger cradles, scan handles
------------	-------------	--

Add-On Battery Replacement Service

Provides replacement batteries every 18 months after purchase.

ADD	SVCBATTERY-MOB3	AddOn, Edge Service, Battery Service, Mobility, 3 Year , 1 Replacement Battery over life of contract
------------	-----------------	---

Add-On Device Replacement Service

Replacement devices should a device be damaged beyond repair.

ADD	SVCREPLACE-MOB3	AddOn, Edge Service, Device Replacement, Mobility, 3 Year
------------	-----------------	--

Add-On Image Management Service

Ensures that when a device returns from being repaired, it has all the proper applications loaded back on the device.

ADD	SVCIMAGEMGMT-MOB3	AddOn, Edge Service, Image Service, Mobility, 3 Year
------------	-------------------	---

Add-On Spare Management Service

Manages every aspect of your spare pool.

ADD	SVCSPAREMGMT-MOB3	AddOn, Edge Service, Advanced Exchange, Mobility, 3 Year . Customer owned spare pool, Minimum Purchase required, contact your local Honeywell Service Representative for more information.
------------	-------------------	---

Add-On Sentinel Extended Service

Security patches and minor enhancements to legacy Android operating systems, typically added after year 3.

ADD	SVSENTINEL-MOB1	Sentinel Service, 1 Year Android Support Contract
ADD	SVSENTINEL-MOB2	Sentinel Service, 2 Year Android Support Contract

Platinum Repair Services – 3 Year

The Edge Services Platinum Support contract is the only total support contract in the industry today offering 2-Day Depot Repairs or Spare Pool Management with 3-year contract, that includes:

Service Overview

- Repair or replacement of damaged components
- SVCREPLACE-MOB3 - Replacement devices should a device be damaged beyond repair
- SVCACC-MOB3 - Accessory replacement service
- SVCBATTERY-MOB3 - Battery replacement service
- PPSW-OPINTEL-PMP36 - Operational Intelligence Performance Professional licenses
- SVCSPAREMGMT-MOB3 - Spare pool management (optional, minimum quantity required)
- Telephone-based technical support
- Sentinel Extended Service that protects customers for future security updates on Android.

PART NUMBER	DESCRIPTION
SVCCT40-SP3N	CT40 / CT40 XP, Edge Service, PLATINUM, 2 Day Turnaround, 3 Year, New Contract
OPERATIONAL INTELLIGENCE SETUP MUST BE ORDERED WITH PLATINUM EDGE SERVICE CONTRACT	
PPPS-OIPLI-SETUP	OplIntel Free Platinum Installation Basic & Professional



HONEYWELL EDGE SERVICES

CT40 / CT40 XP – Repair Services

Honeywell Edge Services give you the confidence of having leading-class technologies combined with service and support plans that are designed to keep you operational for longer.

Gold Repair Services – 5 Year

The most flexible contract in the industry. The Edge Services Gold Support contract allows you to select the right coverage for your organization, and includes 5-Day Depot Repairs and:

Service Overview

- Repair or replacement of damaged components, wear and tear, and accidental damage.
- Flexibility to add any Add-On Service

PART NUMBER	DESCRIPTION
SVCCT40-SG5N	CT40 / CT40 XP, Edge Service, GOLD Maintenance Contract, 5 Day Turnaround, 5 Year , New Contract

Add-On Accessory Replacement Service

Provides replacement chargers, docks, charging cables, or scan handles should they be damaged or stop working.

ADD	SVCACC-MOB5	AddOn, Edge Service, Accessory Service , Mobility, 5 Year . Service covers docks, charger cradles, scan handles
------------	-------------	--

Add-On Battery Replacement Service

Provides replacement batteries every 18 months after purchase.

ADD	SVCBATTERY-MOB5	AddOn, Edge Service, Battery Service, Mobility, 5 Year , 2 Replacement Battery over life of contract
------------	-----------------	---

Add-On Device Replacement Service

Replacement devices should a device be damaged beyond repair.

ADD	SVCREPLACE-MOB5	AddOn, Edge Service, Device Replacement, Mobility, 5 Year
------------	-----------------	--

Add-On Image Management Service

Ensures that when a device returns from being repaired, it has all the proper applications loaded back on the device.

ADD	SVCIMAGEMGMT-MOB5	AddOn, Edge Service, Image Service, Mobility, 5 Year
------------	-------------------	---

Add-On Spare Management Service

Manages every aspect of your spare pool.

ADD	SVCSPAREMGMT-MOB5	AddOn, Edge Service, Advanced Exchange, Mobility, 5 Year . Customer owned spare pool, Minimum Purchase required, contact your local Honeywell Service Representative for more information.
------------	-------------------	---

Add-On Sentinel Extended Service

Security patches and minor enhancements to legacy Android operating systems, typically added after year 3.

ADD	SVSENTINEL-MOB1	Sentinel Service, 1 Year Android Support Contract
ADD	SVSENTINEL-MOB2	Sentinel Service, 2 Year Android Support Contract

Platinum Repair Services – 5 Year

The Edge Services Platinum Support contract is the only total support contract in the industry today offering 2-Day Depot Repairs or Spare Pool Management with 5-year contract, that includes:

Service Overview

- Repair or replacement of damaged components
- SVCREPLACE-MOB5 - Replacement devices should a device be damaged beyond repair
- SVCACC-MOB5 - Accessory replacement service
- SVCBATTERY-MOB5 - Battery replacement service
- PPSW-OPINTEL-PMP60 - Operational Intelligence Performance Professional licenses
- SVCSPAREMGMT-MOB5 - Spare pool management (optional, minimum quantity required)
- Telephone-based technical support
- Sentinel Extended Service that protects customers for future security updates on Android. The 5 year Sentinel coverage provides extended Android updates in years 4 and 5.

PART NUMBER	DESCRIPTION
SVCCT40-SP5N	CT40 / CT40 XP, Edge Service, PLATINUM, 2 Day Turnaround, 5 Year, New Contract
OPERATIONAL INTELLIGENCE SETUP MUST BE ORDERED WITH PLATINUM EDGE SERVICE CONTRACT	
PPPS-OIPLI-SETUP	OpIntel Free Platinum Installation Basic & Professional



HONEYWELL REPAIR SERVICES

CT40 / CT40 XP – Repair Services Coverage

For Best-In-Class Service

CT40 / CT40 XP



Warranty Cover Against Product Defect

BASIC Service

Gold Coverage:

- Accidental Damage
- Wear & Tear

Includes Replacement of:

- Handstrap
- Screen Protector



Flexible GOLD Add-Ons ordered separately

- SVCACC-MOB3
- SVCBATTERY-MOB3
- SVCREPLACE-MOB3
- SVCIMAGEMGMT-MOB3
- SVCSPAREMGMT-MOB3

Accessories
Batteries
Device Replacement
Image Service
Advanced Exchange

GOLD Service

Platinum Coverage

- Battery Replacement
- Coverage for Docks/ Chargers
- Sentinel Extended Service for Android Security Updates

- Accidental Damage
- Device Replacement
- Wear & Tear



Pistol Grip



Battery
(3 Year – 1 replacement battery per CT40)
(5 Year – 2 replacement batteries per CT40)



Vehicle Dock



Docks



Car Chargers



Dock Power Supplies

PLATINUM Service


PART NUMBER	DESCRIPTION
SVCCT40-EXW2	CT40 / CT40 XP, BASIC, 10-15 Day Turnaround, 2 Years (1 Year Factory Warranty + 1 Year Extended)
SVCCT40-SG3N	CT40 / CT40 XP, Edge Service, GOLD Maintenance Contract, 5 Day Turnaround, 3 Year, New Contract
ADD SVCACC-MOB3	AddOn, Edge Service, Accessory Service , Mobility, 3 Year. Service covers docks, charger cradles, scan handles and car adapter
ADD SVCBATTERY-MOB3	AddOn, Edge Service, Battery Service, Mobility, 3 Year, 1 Replacement Battery over life of contract
ADD SVCREPLACE-MOB3	AddOn, Edge Service, Device Replacement, Mobility, 3 Year
ADD SVCIMAGEMGMT-MOB3	AddOn, Edge Service, Image Service, Mobility, 3 Year
ADD SVCSPAREMGMT-MOB3	AddOn, Edge Service, Advanced Exchange, Mobility, 3 Year. Customer owned spare pool, Minimum Purchase required.
SVCCT40-SP3N	CT40 / CT40 XP, Edge Service, PLATINUM, 2 Day Turnaround, 3 Year, New Contract

CT40 / CT40 XP SOFTWARE

Device Client Pack

Device Client Pack (DCP) includes first year maintenance. Add additional years of software maintenance for the applications below.

Device Client Pack

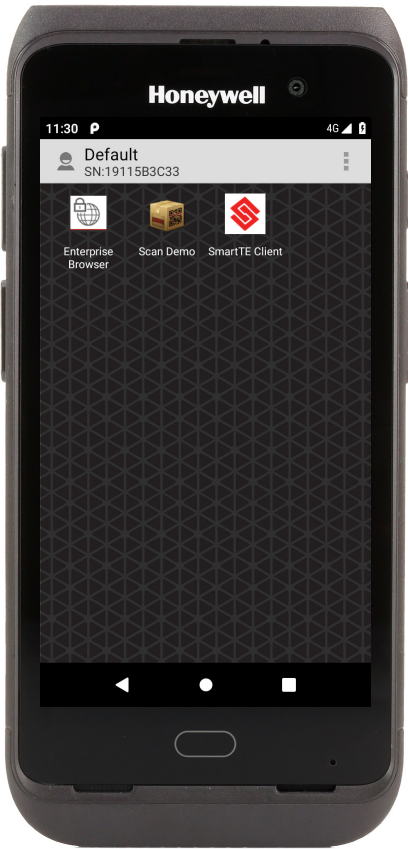

Launcher - gives the customer total control over which apps can be run on the device.



BasicTE Android device Terminal Emulation is a simplified alternative for those not yet ready to upgrade to SmartTE.



Enterprise Browser provides corporations the ability to run standard web applications from a controlled environment.

PART NUMBER	DESCRIPTION
DCP-001	Device Client Pack License (Launcher, BasicTE & Enterprise Browser)
DCP-SFT1	Device Client Pack - 1 Year Maintenance (Launcher, BasicTE & Enterprise Browser)
DCP-SFT3	Device Client Pack - 3 Year Maintenance (Launcher, BasicTE & Enterprise Browser)

Order Separately



Terminal Emulator – Full featured SmartTE allows legacy green screen apps to be transformed to the look and feel of native apps. These clients are single session Honeywell TE Licensing. They can also utilize traditional single or multi-session StayLinked Licenses.

PART NUMBER	DESCRIPTION
SMARTTE-001	SMARTTE - SINGLE PATH W-1 Year Maintenance
SMARTTE-SFT3	SMARTTE – 3 Year Software Maintenance
SMARTTE-SFT5	SMARTTE – 5 Year Software Maintenance

CT40 / CT40 XP SCANNING

Scan Handle Side by Side Comparison

Use for Scan intensive applications.



	PART NUMBER	DESCRIPTION
1	CT40-SH-DC	CT40 Scan Handle
2	CT40-SH-PB	Kit, CT40 scan handle includes TPU boot (CT40-PB-XP), compatible with CT40 and CT40 XP
3	CT40-SH-CC	CT40 Scan Handle Uncover Camera

CT40 / CT40 XP SCANNING

Option 1 - Scan Handle

Use for Scan intensive applications.



CT40 with Scan Handle Installed on Home Base

PART NUMBER		DESCRIPTION			
1	CT40-SH-DC	CT40 Scan Handle			
		Compatible for use with Home Base and Charge Base without removal.			
		CT40-HB-0 / CT40-HB-UVN-0	Home Base	CT40-CB-CNV-0 / CT40-CB-UVN-0	Quad Charge Base
		CT40-EB-0 / CT40-EB-UVN-0	Ethernet Home Base	CT40-NB-CNV-0 / CT40-NB-UVN-0	Quad Net Base
		CT40-DB-0 / CT40-DB-UVN-0	Display Base		
		Not Compatible with the Protective Boot Bases			
		CT40-HB-UVB-0	Protective Boot Home Base		
		CT40-EB-UVB-0	Protective Boot Ethernet Home Base		
		CT40-DB-UVB-0	Protective Boot Display Base		
		CT40-CB-PB-0	Protective Boot Quad Charge Base	CT40-CB-UVB-0	Protective Boot Quad Charge Base
		CT40-NB-PB-0	Protective Boot Quad Net Base	CT40-NB-UVB-0	Protective Boot Quad Net Base

CT40 / CT40 XP SCANNING

Option 2 – Scan Handle with Protective Boot

Use for Scan intensive applications with additional protection of the protective boot.
This scan handle is ONLY compatible with protective boot charging docks.




PART NUMBER		DESCRIPTION			
1	CT40-SH-PB	Kit, CT40 scan handle and includes TPU boot (CT40-PB-XP) compatible with CT40 and CT40 XP Compatible for use with Protective Boot Home Base and Charge Base without removal.			
		CT40-HB-UVB-0	Protective Boot Home Base		
		CT40-EB-UVB-0	Protective Boot Ethernet Home Base		
		CT40-DB-UVB-0	Protective Boot Display Base		
		CT40-CB-PB-0	Protective Boot Quad Charge Base	CT40-CB-UVB-0	Protective Boot Quad Charge Base
		CT40-NB-PB-0	Protective Boot Quad Net Base	CT40-NB-UVB-0	Protective Boot Quad Net Base
		Not Compatible with the Non-Protective Boot Bases			
CT40-HB-0 / CT40-HB-UVN-0		Home Base	CT40-CB-CNV-0 / CT40-CB-UVN-0	Quad Charge Base	
CT40-EB-0 / CT40-EB-UVN-0		Ethernet Home Base	CT40-NB-CNV-0 / CT40-NB-UVN-0	Quad Net Base	
CT40-DB-0 / CT40-DB-UVN-0		Display Base			

CT40 / CT40 XP SCANNING

Option 3 – Scan Handle for use with Camera

Use for Scan intensive applications as well as unimpeded access to the Camera.

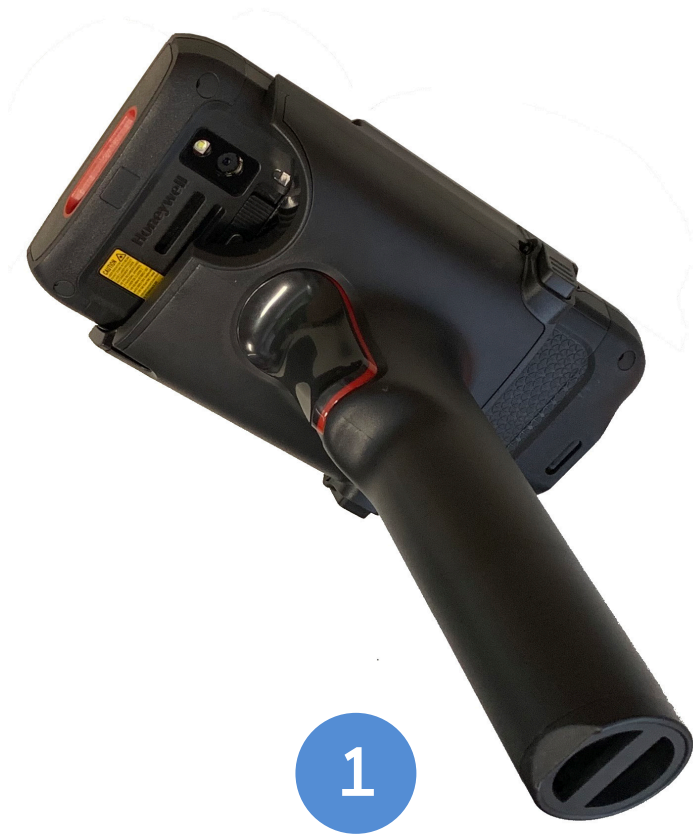

CT40 with Scan Handle Installed on Home Base

PART NUMBER		DESCRIPTION			
1	CT40-SH-CC	CT40 Scan Handle Uncover Camera Compatible for use with Home Base and Charge Base without removal.			
		CT40-HB-0 / CT40-HB-UVN-0	Home Base	CT40-CB-CNV-0 / CT40-CB-UVN-0	Quad Charge Base
		CT40-EB-0 / CT40-EB-UVN-0	Ethernet Home Base	CT40-NB-CNV-0 / CT40-NB-UVN-0	Quad Net Base
		CT40-DB-0 / CT40-DB-UVN-0	Display Base		
		Not Compatible with the Protective Boot Bases			
		CT40-HB-UVB-0	Protective Boot Home Base		
		CT40-EB-UVB-0	Protective Boot Ethernet Home Base		
		CT40-DB-UVB-0	Protective Boot Display Base		
		CT40-CB-PB-0	Protective Boot Quad Charge Base	CT40-CB-UVB-0	Protective Boot Quad Charge Base
		CT40-NB-PB-0	Protective Boot Quad Net Base	CT40-NB-UVB-0	Protective Boot Quad Net Base

CT40 / CT40 XP DESKTOP COMMUNICATIONS

Option 1 – Portable – Non-Booted

USB Communication to PC/ Mac OR Snap-On Charging.



	PART NUMBER	DESCRIPTION
1	CT40-SN-USB-0	Snap-on cup with Standard Type A connector.
2	50136024-001	KIT,5V/2A PS,5 PLUGS PACKED, ROW Includes US,UK,AU,EU,IN adapters

Option 2 – Portable – Non-Booted or Booted

USB Communication to PC/ Mac OR Snap-On Charging.



	PART NUMBER	DESCRIPTION
1	CT40-SN-CNV	Snap on adaptor for charging CT40 with or without boot with a convertible adaptor. Provides tethered USB client connectivity. Compatible with hand strap, battery pack, and scan handle. Charges mobile computer battery in four hours or less. Kit includes snap-on adapter with convertible adaptor. Optional 50136024-001 (5 V/2 A) USB power wall adapter sold separately.

CT40 XP COMMUNICATIONS

Option 3 – CT40 XP USB Type C On-The-Go (OTG) Desktop

USB C Communication to PC/ Mac OR Charging.
Only Compatible with CT40 XP.



	PART NUMBER	DESCRIPTION
1	CBL-500-120-S00-05	USB type A to type C, 1.2 m (3.9 ft)
2	50136024-001	KIT,5V/2A PS,5 PLUGS PACKED, ROW Includes US,UK,AU,EU,IN adapters

Option 4 – CT40 XP USB Type C On-The-Go (OTG) Vehicle

USB C Communication to Vehicle OR Charging.
Only Compatible with CT40 XP.



	PART NUMBER	DESCRIPTION
1	CBL-500-120-S00-05	USB type A to type C, 1.2 m (3.9 ft)
2	CT40-CIGR-0	Accessory Cigarette Lighter Power Adapter with USB Socket (Provides 12 V/24 V cigarette lighter port to USB type-A power adapter for snap-on use in a vehicle)

CT40 / CT40 XP DESKTOP COMMUNICATIONS

Option 5 – Fixed

USB and optional Ethernet Communication & Single Battery Charger.
Not Compatible with CT40-RB-00 Rubber Boot or CT40-PB-00 / CT40-PB-XP Protective Boot



	PART NUMBER	DESCRIPTION
1	CT40-HB-0	HomeBase - Kit includes Dock & Power Supply, must order Power Cord separately
OR	CT40-EB-0	eHomeBase – Ethernet Kit includes Dock & Power Supply, must order Power Cord separately
2	321-576-004	Cable Assembly - USB Type A to Type B
3	**	AC Power Cord – See Page 45 for Country Specific Power Cords

Option 6 – Fixed with Universal Cup

USB and optional Ethernet Communication & Single Battery Charger.
Not Compatible with CT40-RB-00 Rubber Boot



	PART NUMBER	DESCRIPTION
1A	CT40-HB-UVN-0	Non-Booted HomeBase - Kit includes (CT40-UCP-N), Dock & Power Supply, No Power Cord
OR	CT40-EB-UVN-0	Non-Booted eHomeBase – Ethernet Kit includes (CT40-UCP-N), Dock & Power Supply, No Power Cord
1B	CT40-HB-UVB-0	Booted HomeBase - Kit includes (CT40-UCP-B), Dock & Power Supply, No Power Cord
OR	CT40-EB-UVB-0	Booted eHomeBase – Ethernet Kit includes (CT40-UCP-B), Dock & Power Supply, No Power Cord
2	321-576-004	Cable Assembly - USB Type A to Type B
3	**	AC Power Cord – See Page 45 for Country Specific Power Cords

CT40 / CT40 XP DESKTOP COMMUNICATIONS

Option 7 – Display Base

Connect USB peripherals (keyboard, mouse) and External Monitor via HDMI.



	PART NUMBER	DESCRIPTION
1	CT40-DB-0	Display Dock - Kit includes Dock & Power Supply, must order Power Cord separately
2	**	AC Power Cord – See Page 45 for Country Specific Power Cords

Option 8 – Display Base with Universal Cup

Connect USB peripherals (keyboard, mouse) and External Monitor via HDMI.



	PART NUMBER	DESCRIPTION
1A	CT40-DB-UVN-0	Non-Booted Display Dock - Kit includes (CT40-UCP-N), Display Base & Power Supply, No Power Cord
1B	CT40-DB-UVB-0	Booted Display Dock - Kit includes (CT40-UCP-B), Display Base & Power Supply, No Power Cord
2	**	AC Power Cord – See Page 45 for Country Specific Power Cords

CT40 / CT40 XP VEHICLE INSTALL

Option 1 – Portable/ Sub Contractor Install

Simple Vehicle Charging, portable between vehicles.
Compatible with CT40 and CT40 XP with or without CT40-PB-XP Protective Boot installed.



	PART NUMBER	DESCRIPTION
1	CT40-SN-CNV	Snap on adaptor for charging CT40 with or without boot with a convertible adaptor. Provides tethered USB client connectivity. Compatible with hand strap, battery pack, and scan handle. Charges mobile computer battery in four hours or less. Kit includes snap-on adapter with convertible adaptor.
2	CT40-CIGR-0	Accessory Cigarette Lighter Power Adapter with USB Socket (Provides 12 V/24 V cigarette lighter port to USB type-A power adapter for snap-on use in a vehicle)

Option 2 – Portable/ Sub Contractor Install

Windscreen Suction Cup Mount, portable between vehicles.
Compatible with CT40 and CT40 XP with or without CT40-PB-XP Protective Boot installed.



	PART NUMBER	DESCRIPTION
1	CT40-VD-CNV	CT40 Booted or Non-Booted Vehicle Dock w/ hard wired 3-pin power cable
2	RAM-B-166-202U	Suction Cup Mount Kit
3	50138169-001	Cigarette Lighter Power Adapter Cable

CT40 / CT40 XP VEHICLE INSTALL

Option 3 – Fixed Vehicle Install with Direct Connection to Vehicle Battery

Best used when the vehicle input voltage varies, 10– 30V.
Compatible with CT40 and CT40 XP with or without CT40-PB-XP Protective Boot installed.



	PART NUMBER	DESCRIPTION
1	CT40-VD-CNV	CT40 Booted or Non-Booted Vehicle Dock w/ hard wired 3-pin power cable
2	203-802-001	Vehicle Dock Installation Kit (Power Option: For connection of Vehicle Dock directly to vehicle battery. Includes power cables and cable mounting hardware)
3	805-611-001	Mounting Kit, V-Dock RoHS

CT40 / CT40 XP VEHICLE INSTALL

Option 4 - Fixed Vehicle Install with Direct Connection to Vehicle Battery/ Fuse Block

Best used when the vehicle input voltage varies, 10- 30V.
Compatible with CT40 and CT40 XP with or without CT40-PB-XP Protective Boot installed.



	PART NUMBER	DESCRIPTION
1	CT40-VD-CNV	CT40 Booted or Non-Booted Vehicle Dock w/ hard wired 3-pin power cable
2	226-109-003	72" (182.88 cm) Fuse block Power Cable with spade lugs and 3-pin connector
OR	226-109-004	22" (55.8 cm) Fuse block Power Cable with spade lugs and 3-pin connector
3	805-611-001	Mounting Kit, V-Dock RoHS
OPTIONAL	203-803-001	Vehicle Dock Fuse Block Power Kit RoHS (Provides connection to vehicle fuse block). Requires Power Cable (226-109-003 or 226-109-004).

CT40 / CT40 XP VEHICLE INSTALL

Option 5 – Fixed Vehicle Install with Thor DC/DC Converter

Best used when the vehicle input voltage varies, 9-60V or 50-150V.
Compatible with CT40 and CT40 XP with or without CT40-PB-XP Protective Boot installed.



PART NUMBER	DESCRIPTION
1	CT40-VD-CNV CT40 Booted or Non-Booted Vehicle Dock w/ hard wired 3-pin power cable
2	9000311PWRSPLY DC/DC Converter Kit, 9-60V DC, RoHS (Requires 226-109-003 Wiring Harness)
OR	9000313PWRSPLY DC/DC Converter Kit, 50-150V DC RoHS (Requires 226-109-003 Wiring Harness)
	226-109-003 72" (182.88 cm) Fuse block Power Cable with spade lugs and 3-pin connector
3	805-611-001 Mounting Kit, V-Dock RoHS

CT40 / CT40 XP VEHICLE INSTALL

CT40 Vehicle Dock 360 degree view



Front View

Front View
CT40 Non-Booted

Front View
CT40 Booted


Rear View

Side View

CT40 / CT40 XP CHARGING AND COMMUNICATION

Option 1 - Non-Booted Quad Charger

Chargebase – Quad Dock Charge Only
Netbase – Quad Dock with Ethernet
Not Compatible with CT40-RB-00 Rubber Boot or CT40-PB-00 / CT40-PB-XP Protective Boot

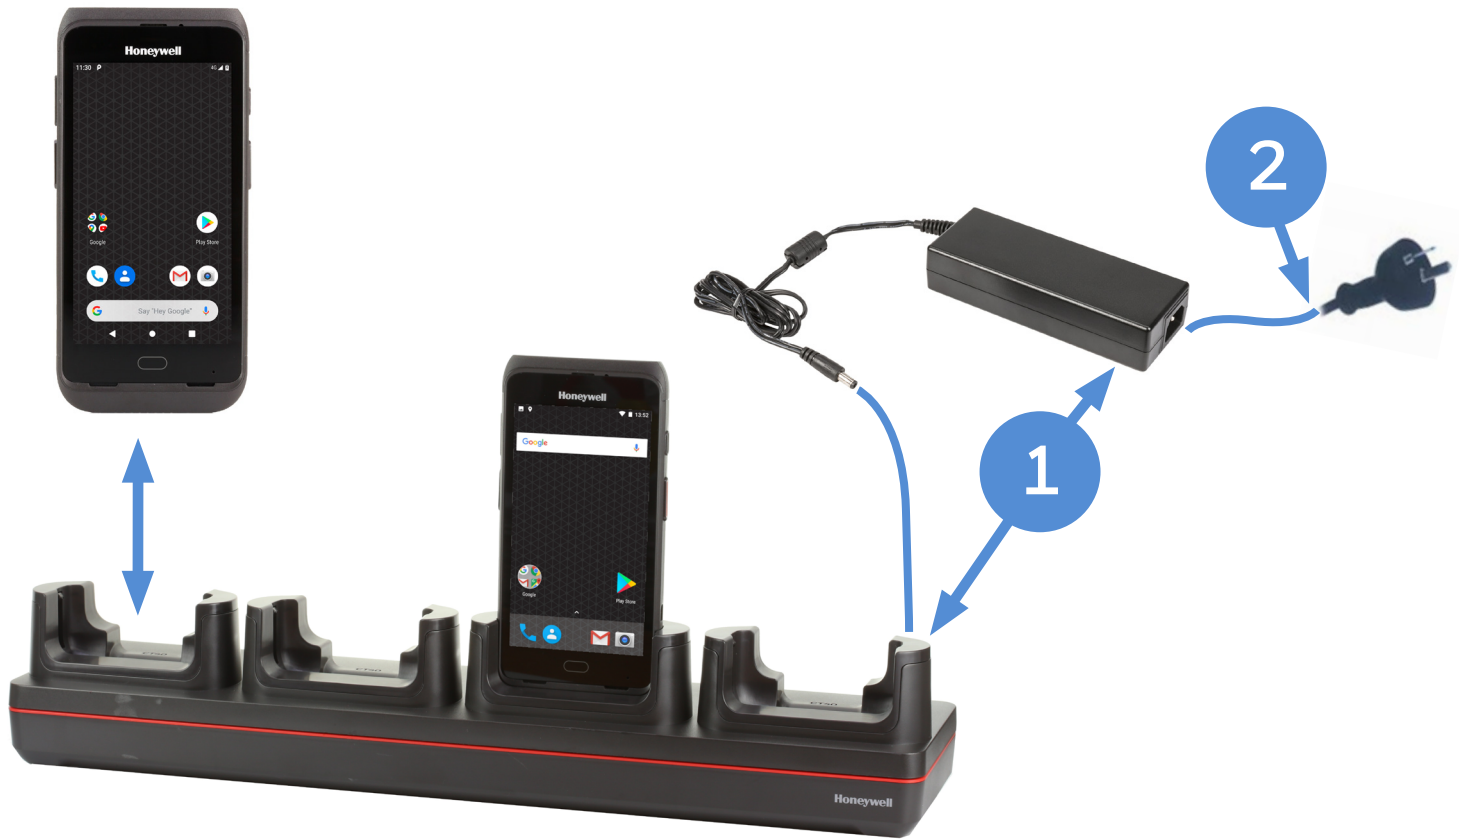

	PART NUMBER	DESCRIPTION
1	CT40-CB-CNV-0	Chargebase - Kit includes Dock and Power Supply
OR	CT40-NB-CNV-0	Netbase - For Ethernet comms, Kit includes Dock and Power Supply
2	**	AC Power Cord – See Page 45 for Country Specific Power Cords

Option 2 - Non-Booted Quad Charger with Universal Cup

Chargebase – Quad Dock Charge Only
Netbase – Quad Dock with Ethernet
Not Compatible with CT40-RB-00 Rubber Boot or CT40-PB-00 / CT40-PB-XP Protective Boot




Kit Includes:
4 x CT40-UCP-N
CT40 Cup for Non-Booted

	PART NUMBER	DESCRIPTION
1	CT40-CB-UVN-0	Non-Booted Chargebase - Kit includes Dock and Power Supply
OR	CT40-NB-UVN-0	Non-Booted Netbase - For Ethernet comms, Kit includes Dock and Power Supply
2	**	AC Power Cord – See Page 45 for Country Specific Power Cords

CT40 / CT40 XP CHARGING AND COMMUNICATION

Option 3 – Booted Quad Charger

Chargebase – Quad Dock Charge Only
Netbase – Quad Dock with Ethernet
Compatible with CT40-PB-00 / CT40-PB-XP Protective Boot

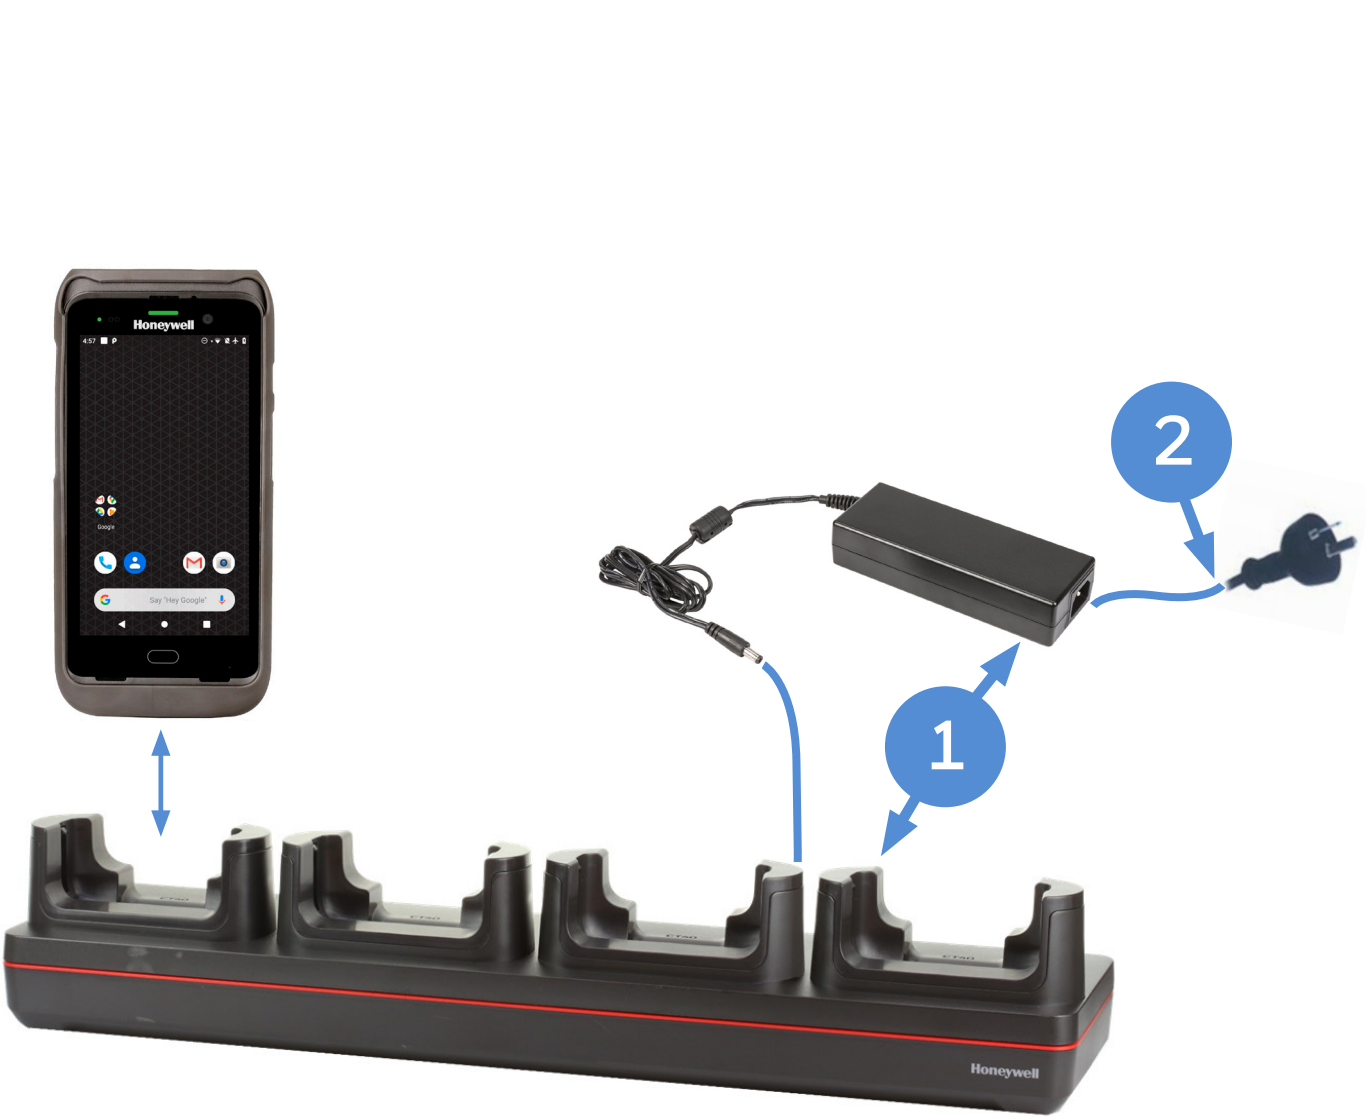

	PART NUMBER	DESCRIPTION
1	CT40-CB-PB-0	Booted Chargebase - Kit includes Dock and Power Supply
OR	CT40-NB-PB-0	Booted Netbase - For Ethernet comms, Kit includes Dock and Power Supply
2	**	AC Power Cord – See Page 45 for Country Specific Power Cords

Option 4 – Booted Quad Charger with Universal Cup

Chargebase – Quad Dock Charge Only
Netbase – Quad Dock with Ethernet
Compatible with CT40-PB-00 / CT40-PB-XP Protective Boot



Kit Includes:
4 x CT40-UCP-B
CT40 Cup for Booted

	PART NUMBER	DESCRIPTION
1	CT40-CB-UVB-0	Booted Chargebase - Kit includes Dock and Power Supply
OR	CT40-NB-UVB-0	Booted Netbase - For Ethernet comms, Kit includes Dock and Power Supply
2	**	AC Power Cord – See Page 45 for Country Specific Power Cords


CT40 / CT40 XP CHARGING AND COMMUNICATION

Option 5 – Quad Battery Charger

Charge up to 4 batteries simultaneously

Supports Batteries:

- 318-055-010 - Battery, Standard, CT40 Gen 1 (4090mAh)
- 318-055-011 - Battery, Standard, CT40 Gen 1 (4040mAh)
- 318-055-014 - Battery, Standard, CT40 Gen 2 (4090mAh)
- 318-055-015 - Battery, Standard, CT40 Gen 2 (4020mAh)
- 318-055-017 - Battery, Standard, CT40 Healthcare (4020mAh)
- 318-055-067 - Battery, Standard, CT40 Gen 2 / XP (4020mAh)
- 318-055-D67 - Battery, Standard, CT40 DRH / XP (4020mAh)
- 318-055-H67 - Battery, Standard, CT40 Healthcare / XP (4020mAh)

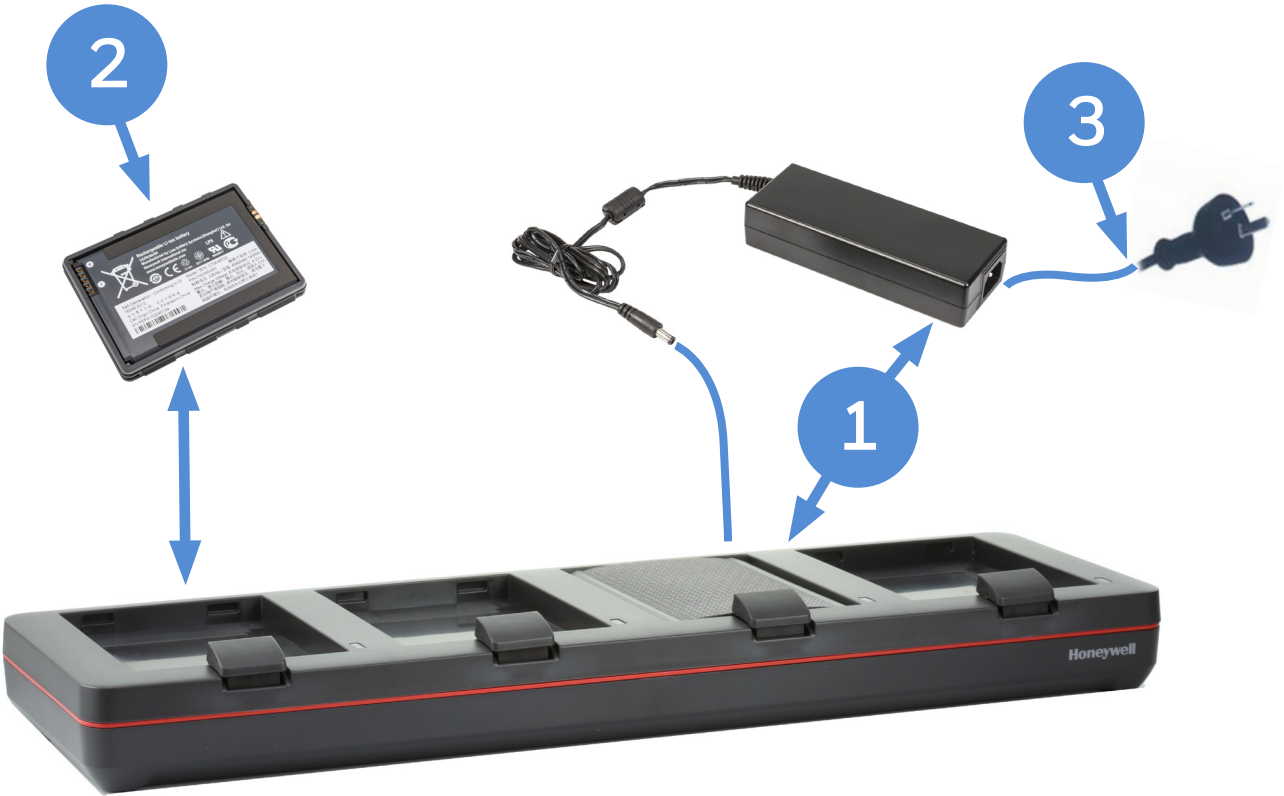

	PART NUMBER	DESCRIPTION
1	CT40-QBC-0	Quad Battery Charger - Kit includes Dock and Power Supply
2	318-055-067	CT40 Gen 2 / XP Battery Pack, 4020mAh
OR	318-055-H67	CT40 Healthcare / XP battery Pack, 3.85V, 4020mAh, White cover
3	**	AC Power Cord – See Page 45 for Country Specific Power Cords

CT40 / CT40 XP BATTERY

Spare Battery Options

1



CT40 Gen 1
CT40-LxN-xxxxx0x

2



CT40 Gen 2
CT40-LON-xxxxxAx
CT40-L1N-xxxxxBx

CT40 XP
CT40P-LON-xxxxxAx
CT40P-L1N-xxxxxBx

3



CT40 Healthcare
CT40-LxN-xxxxxHx

CT40 XP Healthcare
CT40P-LxN-xxxxxHx

4



CT40 Disinfectant Ready
CT40-LxN-xxxxxDx

CT40 XP Disinfectant Ready
CT40P-LxN-xxxxxDx



	PART NUMBER	DESCRIPTION
1	318-055-011	CT40 Gen 1 Battery Pack, 4040mAh, for use with CT40 configurations with plastic battery latch button
2	318-055-067	CT40 Gen 2 / XP Battery Pack, 4020mAh, for use with CT40 configurations with metal battery latch button
3	318-055-H67	CT40 Healthcare / XP Battery Pack, 4020mAh, White cover, Healthcare
4	318-055-D67	CT40 Disinfectant Ready / XP Battery Pack, 4020mAh

CT40 / CT40 XP RFID

IH21 RFID Reader

Connect the IH21 to the CT40 via Bluetooth.



IH21 Charging Cradle

	PART NUMBER	REGION	DESCRIPTION
1	IH21A0020	AUS	IH21 Bluetooth RFID Reader with e-Pop-Loq, UHF Antenna, Trigger Handle, Battery, Battery Cover, no imager, red and black. AU
OR	IH21A0014	FCC	IH21 Bluetooth RFID Reader with e-Pop-Loq, UHF Antenna, Trigger Handle, Battery, Battery Cover, no imager, red and black.FCC
OR	IH21A0002	ETSI	IH21 Bluetooth RFID Rëader with e-Pop-Loq, UHF Antenna, Trigger Handle, Battery, Battery Cover, no imager, red and black.ETSI
2	IH21-EPL-CT40		Cover,ePop-Loq CT40, IH21
3	IH21-CB-1		IH21 Docking Cradle with World traveler PSU and Mini USB Lead, red and black
OPTIONAL	IH21-QBC-1		4-Slot Battery Charger. Order power supply 851-812-001 & Power Cord separately
OPTIONAL	851-812-001		AC ADAPTER,12V/60W,2.5X5.5MM,LEVEL VI. Order AC Power Cord – See Page 45 for Country Specific Power Cords
OPTIONAL	318-060-001		Spare Battery for IH21 RFID reader

CT40 / CT40 XP RFID

IH25 RFID Reader

Connect the IH25 to the CT40 via Bluetooth.



	PART NUMBER	REGION	DESCRIPTION
1	IH25-0-N001S00UK	FCC	IH25 High-Performance UHF RFID tag reader, US Frequency Range of RFID output (902-928MHz), Includes 50134176-001 Battery
OR	IH25-0-N001S000K	ETSI	IH25 High-Performance UHF RFID tag reader, EU Frequency Range of RFID output (865-868 MHz), Includes 50129589-001 Battery
OR	IH25-0-N001S00JK	JAPAN	IH25 High-Performance UHF RFID tag reader, Japan, US Frequency Range of RFID output (902-928MHz), Includes 50129589-001 Battery
OR	IH25-0-N001S00KK	KOREA	IH25 High-Performance UHF RFID tag reader, Korea, US Frequency Range of RFID output (902-928MHz), Includes 50129589-001 Battery
2	IH25-BR-2		IH25 Bracket for CT40
3	50155100-001		IH25 Wrist Strap

CT40 / CT40 XP RFID

IH25 RFID Reader Charging Options

IH25 shares the same chargers as EDA50/ EDA51.



IH25 Home Base



IH25 Charge Base



IH25 Quad Battery Charger

	PART NUMBER	DESCRIPTION
1	EDA51-HB-0	Charging cradle for charging ScanPal EDA50/EDA50hc/ EDA51 terminal and battery. Compatible with scan handle. No Power Cord. Also fit with IH25 for charging purposes
2	EDA50-CB-0	For recharging up to 4 computers. Kit includes Dock, Power Supply, No Power Cord.
3	EDA50-QBC-0	Klit IH25/EDA50/EDA70/EDA71 Quad Battery Charger. Kit includes Dock, Power Supply, No Power Cord.
**		AC Power Cord – See Page 45 for Country Specific Power Cords

CT40 HEALTHCARE CHARGING AND COMMUNICATION

Option 1 – Non-Booted Quad Charger with Universal Cup

Netbase – Quad Dock with Ethernet
Not Compatible with CT40-RB-00 Rubber Boot or CT40-PB-00 / CT40-PB-XP Protective Boot



Kit Includes:
4 x CT40-UCP-NHC
CT40 Cup for Non-Booted

PART NUMBER		DESCRIPTION
1	CT40-NB-UVN-HCO	Non-Booted Net base with disinfectant ready housing, for Ethernet comms and recharging upto 4 computers without protective boot. Kit includes Dock and Power Supply, must order Power Cord separately.
2	**	AC Power Cord – See Page 45 for Country Specific Power Cords

Option 2 – Booted Quad Charger with Universal Cup

Netbase – Quad Dock with Ethernet
Compatible with CT40-PB-00 / CT40-PB-XP Protective Boot



Kit Includes:
4 x CT40-UCP-BHC
CT40 Cup for Booted

PART NUMBER		DESCRIPTION
1	CT40-NB-UVB-HCO	Booted Net base with disinfectant ready housing, for Ethernet comms and recharging upto 4 computers with protective boot. Kit includes Dock and Power Supply, must order Power Cord separately.
2	**	AC Power Cord – See Page 45 for Country Specific Power Cords


CT40 HEALTHCARE CHARGING AND COMMUNICATION

Option 3 – CT40 HC Display Base with Universal Cup


Connect USB peripherals (keyboard, mouse) and External Monitor via HDMI.



2 x USB Type A on the side
Side View

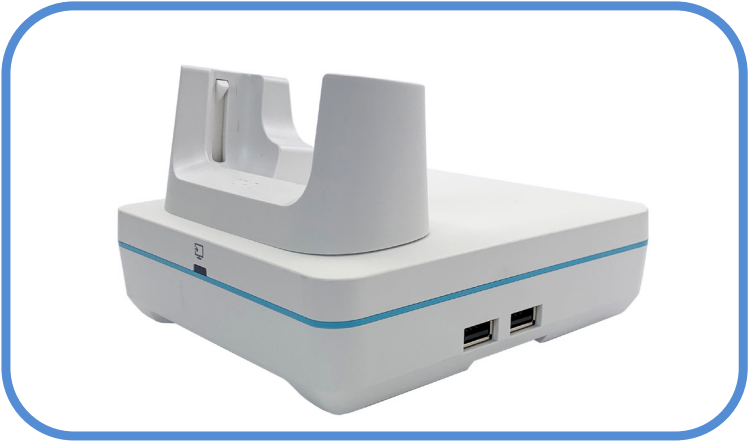

Angle View

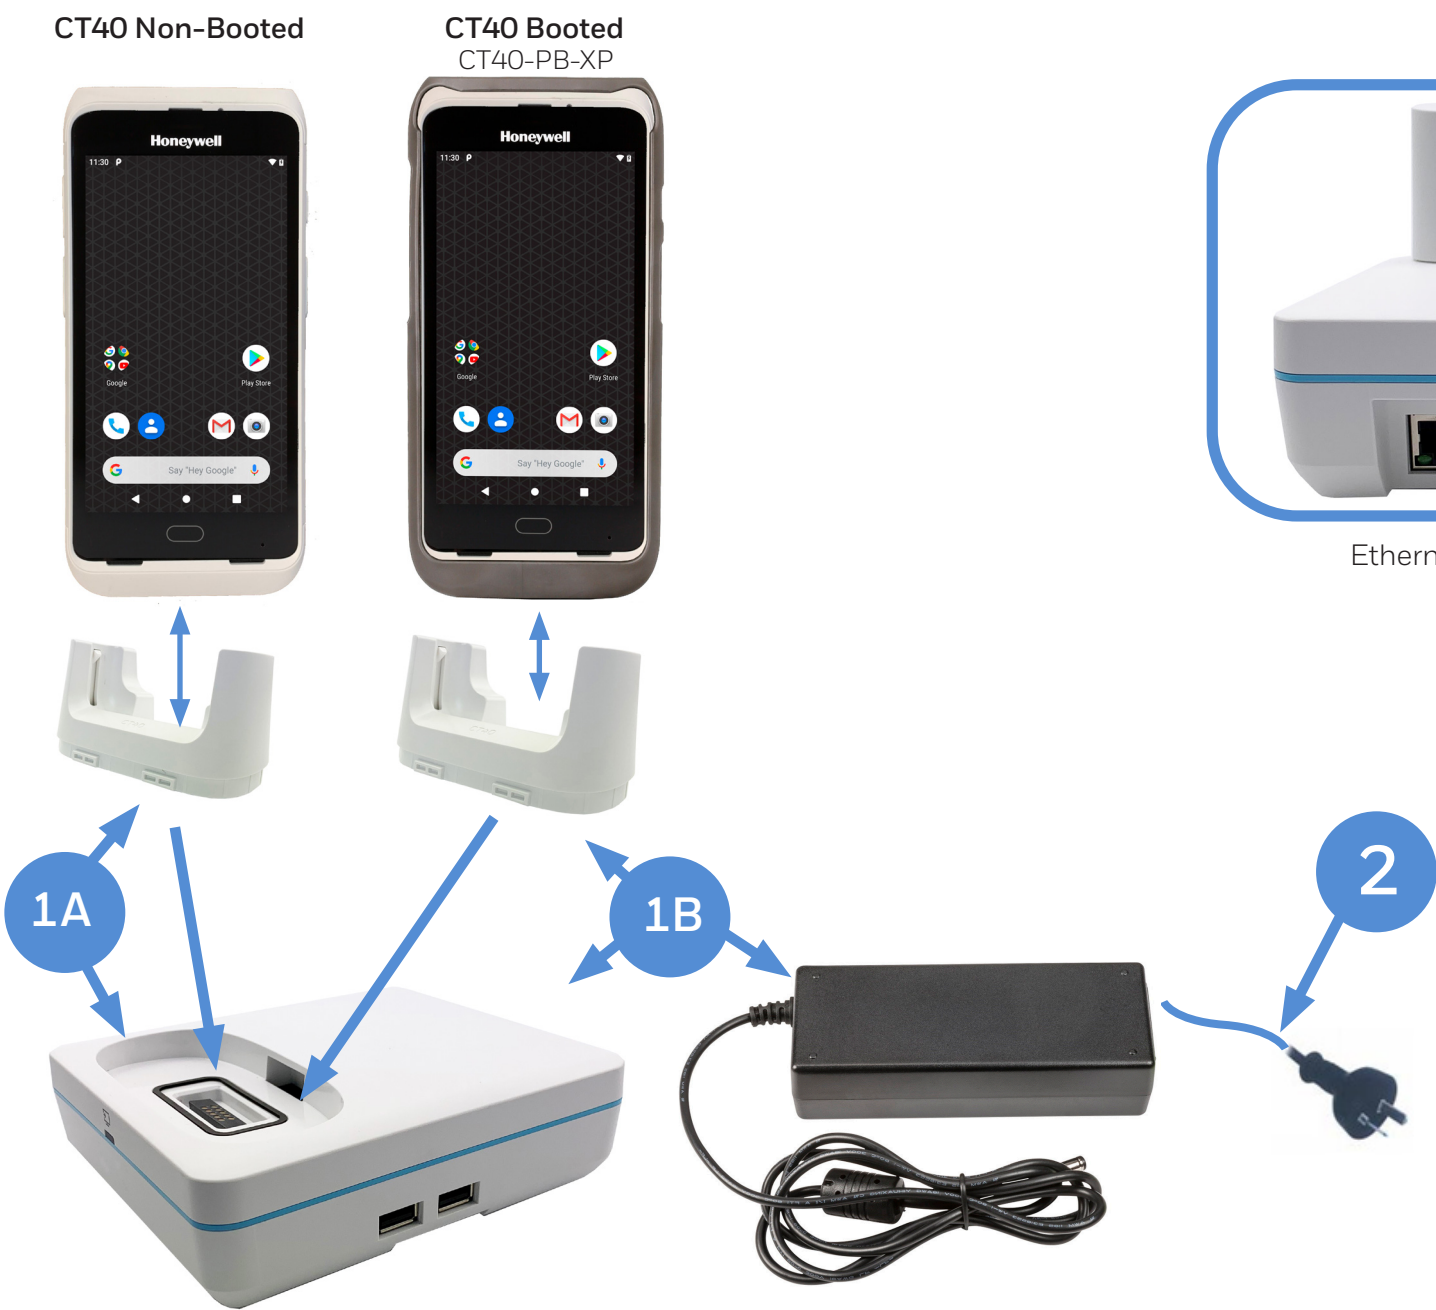

Ethernet USB A HDMI POWER
Rear View

PART NUMBER	DESCRIPTION
1A	CT40-DB-UVN-HCO Non-Booted Display Dock with disinfectant ready housing - Kit includes (CT40-UCP-NHC), Display Base & Power Supply, No Power Cord
1B	CT40-DB-UVB-HCO Booted Display Dock with disinfectant ready housing - Kit includes (CT40-UCP-BHC), Display Base & Power Supply, No Power Cord
2	** AC Power Cord – See Page 45 for Country Specific Power Cords

CT40 / CT40 XP PROTECTIVE BOOT

Option 1 - Rubber Boot

Use for added protection of the CT40.
Not Compatible with Scan Handles / Home Base / Charge Base Docks / Vehicle Dock.



	PART NUMBER	DESCRIPTION
1	CT40-RB-00	CT40 Rubber Boot

Option 2 - Dockable Protective Boot

Use when protective boot is required with or without scan handle and dockable.





	PART NUMBER	DESCRIPTION
1	CT40-PB-00	CT40 TPU boot (Not Compatible with CT40 XP)
OR	CT40-PB-XP	CT40 protective boot to charge CT40XP & general CT40 configurations. A boot with the ability to expose the CT40XP 's Push To Talk (PTT) button.

CT40 / CT40 XP HEADSET

CT40 Push To Talk (PTT) and VoIP Headset

PTT and VoIP ready to support In-Store Communication with leading 3rd party applications.

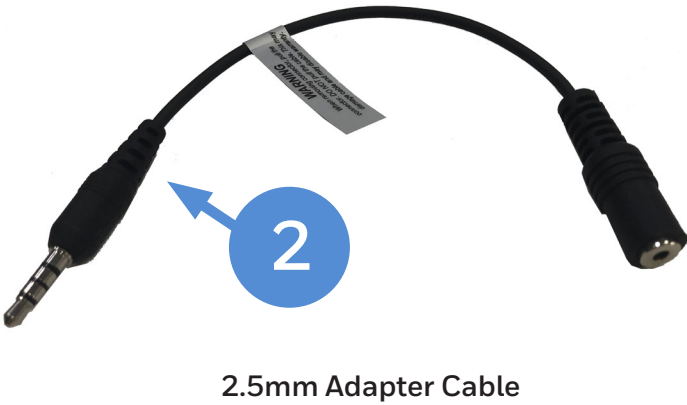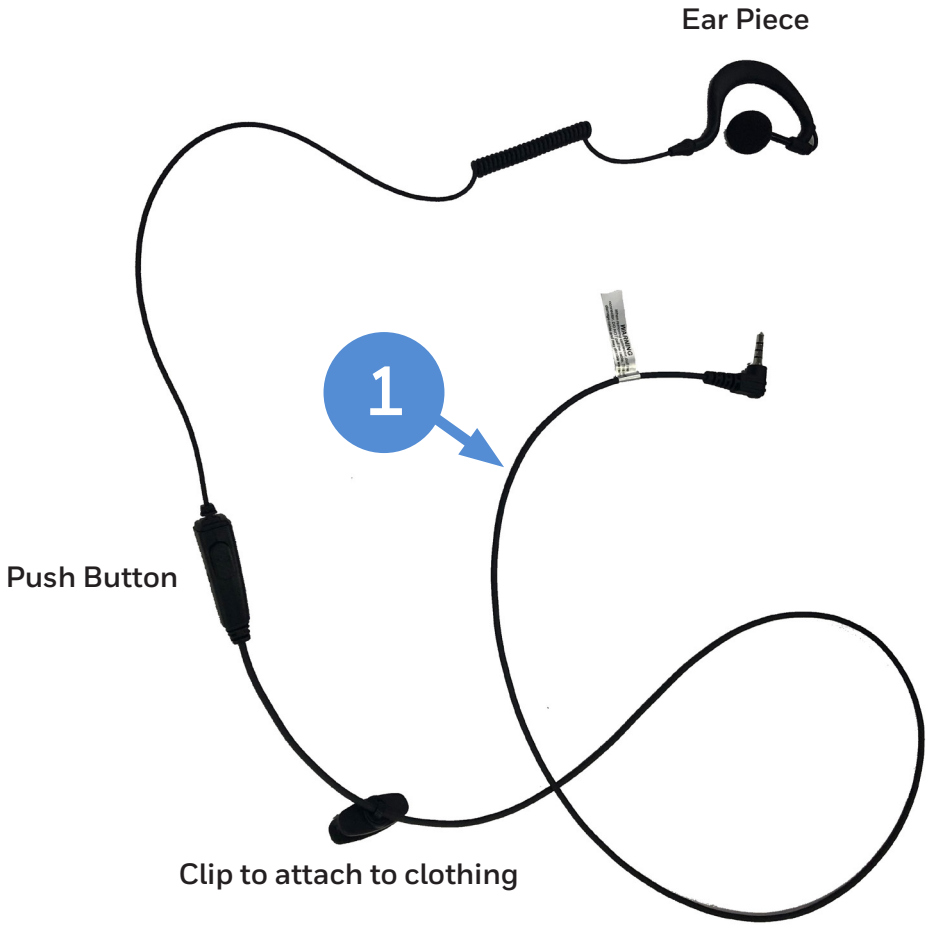

	PART NUMBER	DESCRIPTION
1	CT40-HDST-35MM	CT40 Headset with PTT, 3.5mm audio jack
OPTIONAL 2	CT40-CVT-25MM	3.5mm plug to 2.5mm Socket Adaptor Cable (for attaching 3rd party 2.5mm headsets)

CT40 / CT40 XP WEARABLE

CT40 with Tethered Ring Scanner

Convert the CT40 into a Wearable Computer with Tethered Ring Scanner.



CT40 / CT40 XP WEARABLE WITH TETHERED RING SCANNER

Option 1 - CT40 Wearable with D75e Arm Band

Re-use existing D75e Arm Band (HWC-ARM BAND).



PART NUMBER	DESCRIPTION
CT40-WS-KIT	CT40 WEARABLE SET, including Holder, tethered ring scanner and arm band
CT40-WS-PB	CT40 Holder with tethered ring scanner
HWC-ARM BAND	Arm Band, Wearable Computer

Option 2 - CT40 Wearable – Arm Band Wrist Pad

Arm Band with wrist pad.



PART NUMBER	DESCRIPTION
CT40-WS-00	CT40 WEARABLE SET, including Holder, tethered ring scanner and arm band.
CT40-WS-PB	CT40 Holder with tethered ring scanner
CT40-WS-AB	Arm Band Wrist Band

See next page for exploded view of individual components.

CT40 / CT40 XP WEARABLE WITH TETHERED RING SCANNER

Option 1 - CT40 Wearable with D75e Arm Band

Re-use existing D75e Arm Band (HWC-ARM BAND).



Large Ring Strap
(One included with CT40-WS-KIT)

Spares - 8600503SOFTSTRAP
20 pack ring finger straps
small soft rubber straps with snap-on mount.
Small Ring Strap
(One included with CT40-WS-KIT)

Spares - 8600504SOFTSTRAP
20 pack ring finger straps
large soft rubber straps with snap-on mount.

	PART NUMBER	DESCRIPTION
1	CT40-PB-XP	CT40 protective boot to charge CT40XP & general CT40 configurations.
2	CT40-WS-KIT	CT40 WEARABLE SET, including Holder, tethered ring scanner and arm band. CT40-WS-PB CT40 Holder with tethered ring scanner HWC-ARM BAND Arm Band, Wearable Computer

Honeywell Repair Services

Option 2 - CT40 Wearable – Arm Band Wrist Pad

Arm Band with wrist pad.



Large Ring Strap
(One included with CT40-WS-00)

Spares - 8600503SOFTSTRAP
20 pack ring finger straps
small soft rubber straps with snap-on mount.
Small Ring Strap
(One included with CT40-WS-KIT)

Spares - 8600504SOFTSTRAP
20 pack ring finger straps
large soft rubber straps with snap-on mount.

	PART NUMBER	DESCRIPTION
1	CT40-PB-XP	CT40 protective boot to charge CT40XP & general CT40 configurations.
2	CT40-WS-00	CT40 WEARABLE SET, including Holder, tethered ring scanner and arm band. CT40-WS-PB CT40 Holder with tethered ring scanner CT40-WS-AB Arm Band Wrist Band


Honeywell Repair Services

MISCELLANEOUS

Optional Parts



PART NUMBER	DESCRIPTION
CT40-HS-3PK	CT40 HAND STRAP, pack of 3

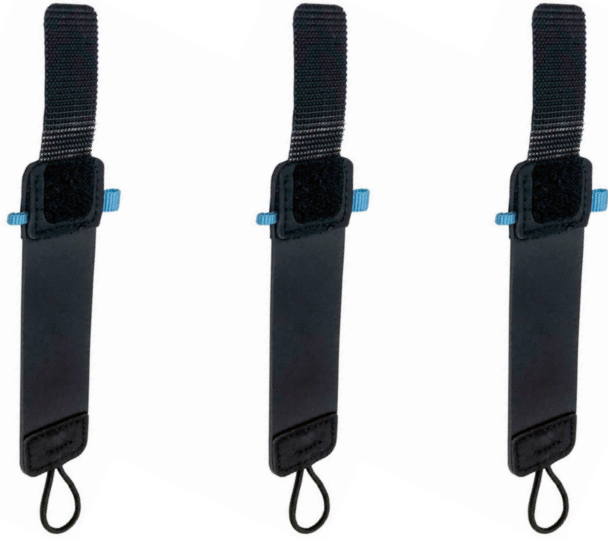

PART NUMBER	DESCRIPTION
CT40-HS-HC	CT40 Healthcare HAND STRAP, 3PCS / PACK



PART NUMBER	DESCRIPTION
50121666-001	Power Adapter,12V 3A, No Power Cord, Compatible with CT40 Homebase / eHomebase / Quad Battery Charger



PART NUMBER	DESCRIPTION
213-048-001	Pack of 5 CT40 / CT50 / CT60 replacement styluses.
8754-871600-20	Pack of 10 CT40 / CT50 / CT60 replacement styluses.



PART NUMBER	DESCRIPTION
CT40-SP-10PK	Contains 10 self-adhesive screen protectors



PART NUMBER	DESCRIPTION
50121667-001	Power Adapter,12V 7A, No Power Cord, CT40 Quad Chargebase/Quad Netbase

MISCELLANEOUS

Optional Parts



PART NUMBER	DESCRIPTION
CT40-UCP-N	CT40 Non-Booted universal cup, to be used for CT40 without protective boot



PART NUMBER	DESCRIPTION
CT40-UCP-B	CT40 Booted universal cup, to be used for CT40 with protective boot (CT40-PB-XP)



PART NUMBER	DESCRIPTION
CT40-UCP-NHC	CT40 Non-Booted disinfectant ready housing universal cup, to be used for CT40 without protective boot



PART NUMBER	DESCRIPTION
CT40-UCP-BHC	CT40 Booted disinfectant ready housing universal cup, to be used for CT40 with protective boot (CT40-PB-XP)

MISCELLANEOUS

Optional Parts



PART NUMBER	DESCRIPTION
CT50-CC-12	CHARGING CABINET FOR CT40/CT50/CT60 with space to house 12 Computers and 12 Spare Batteries. Quad battery chargers (CT40-QBC-0) and Quad ChargeBase (CT40-CB-0)



PART NUMBER	DESCRIPTION
CT40-QL-00	CT40 Quad Lock Case Mount CT40 to 3rd party RFID readers



PART NUMBER	DESCRIPTION
825-237-001	POUCH, CT40/CT50/CT60/CT60 XP




PART NUMBER	DESCRIPTION
825-238-001	CT40/CT50/CT60/CT60 XP Holster

MISCELLANEOUS

Micro-SD Cards

Honeywell Recommended – ATP Industrial Grade Micro SD Cards

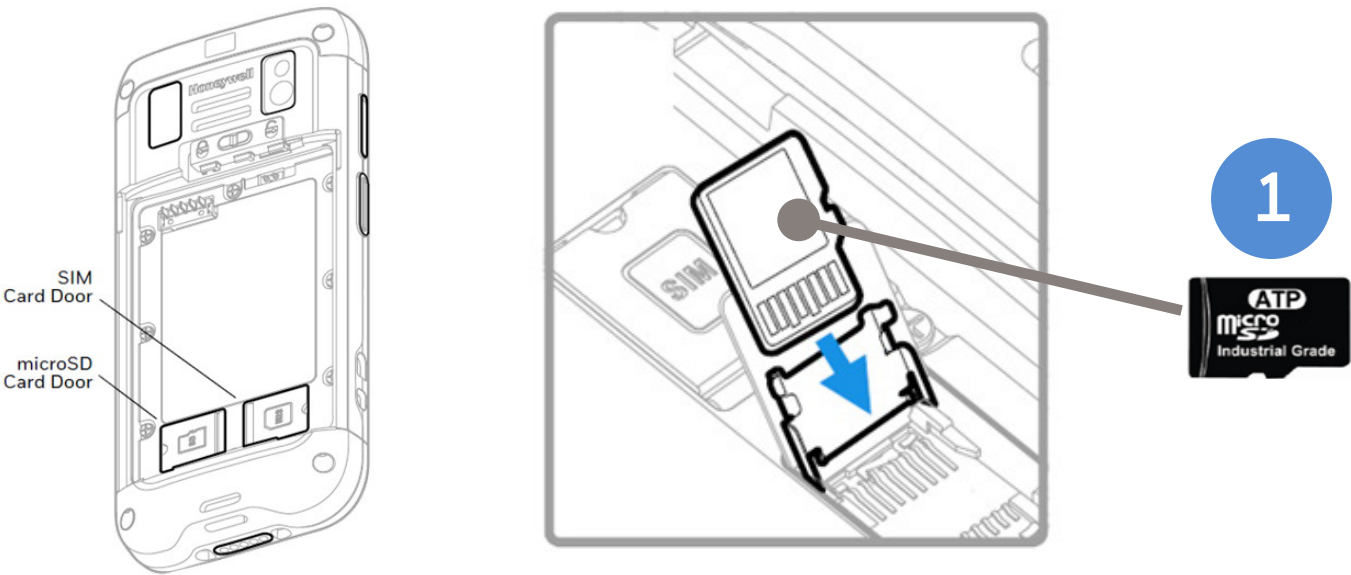

Why ATP Industrial Grade SD?

ATP's SIP (System-In-Packaging) manufacturing process encapsulates all exposed components and points of failure to ensure the products are fully waterproof, shockproof, and ESD (Electro-Static Discharge) proof. ATP Industrial Grade SD/SDHC Cards can withstand at least an operating/storage temperature range of at least -40 to 85 degrees Celsius. In addition to this temperature range, the cards are completely waterproof, dustproof, and ESD (Electro-Static Discharge) proof. All ATP Industrial Grade SD/SDHC cards are produced under a stringent RoHs and Green Package compliant manufacturing process to guarantee a consistent high level of build quality and performance. ATP Industrial SD cards deliver outstanding performance with read speed (seq) up to 18MB/sec and write speed (seq) up to 16MB/sec. All ATP Industrial Grade CF, SD, USB drives, and SSDs are constructed using best-in-class SLC(Single-Level Cell) components with enhanced Error Correction Code(ECC) functions and wear levelling algorithms. This results in MTBF ratings over 2 million hours and the highest write cycle lifetimes in the industry.

	PART NUMBER	DESCRIPTION
1	856-065-004	MICRO-SD CARD, 1GB , AFIGUDI, ROHS
OR	856-065-005	MICRO-SD CARD, 2GB , AFIGUDI, ROHS
OR	856-065-006	MICRO-SD CARD, 4GB , AFIGUDI, ROHS
OR	856-065-007	MICRO-SD CARD, 8GB , AFIGUDI, ROHS

AC Cords

Regional Power Cords



AC Power - C13 Type Connector

PART NUMBER	DESCRIPTION
50117501-001	POWER CORD AUSTRALIA 2500MM,SLED CB
321-501-002	AC Power Cord, Denmark RoHS
77900508E	Cable: power cord, power supply to AC outlet, straight, Power cord, Europe EU, IEC320-C13, 2.5 m (8.2 ft)
321-502-002	AC Power Cord, India/S Africa RoHS
321-500-002	AC Power Cord, Japan RoHS
9000093CABLE	AC POWER CABLE, C14 TYPE, SWITZERLAND 3-PIN
77900507E	Cable: power cord, power supply to AC outlet, straight - Power cord, UK, IEC320-C13, 2.5 m (8.2 ft)
1-974028-025	AC Power Cord, US RoHS

MISCELLANEOUS

Disclaimer

Honeywell International Inc. (“HII”) reserves the right to make changes in specification and other information contained in this document without prior notice, and the reader should in all cases consult HII to determine whether any such changes have been made. The information in this publication does not represent a commitment on the part of HII.

HII shall not be liable for technical or editorial errors or omissions contained herein; nor for incidental or consequential damages resulting the furnishing, performance, or use of this material.

This document contains proprietary information that is protected by copyright. All rights are reserved. No part of this document may be photocopied, reproduced, or translated into another language with-out prior written consent of HII.

Web Address: www.honeywellaidc.com

The Bluetooth trademarks are owned by Bluetooth SIG, Inc., U.S.A and licensed to Honeywell.

Thor and Mobility Edge are trademarks or registered trademarks of Honeywell International Inc. in the United States and/or other countries.

Android is a trademark or registered trademark of Google Inc. in the United States and/or other countries. Windows is a trademark or registered trademark of Microsoft Corporation.

Qualcomm and Snapdragon are trademarks or registered trademarks of Qualcomm Incorporated in the United States and/or other countries.

Other product names mentioned in the manual may be trademarks of registered trademarks of their respective companies and are the property of their respective owners.

All rights reserved.

For more information

www.honeywellaidc.com

Honeywell Safety and Productivity Solutions

9680 Old Bailes Road
Fort Mill, SC 29707
800-582-4263
www.honeywell.com